



BSP250101
Combi-steam oven 200 series
Full glass door in Gaggenau Anthracite
Width 60 cm
right-hinged
Controls at the top

Flush installation
Water tank for fresh and waste water
Large cavity
LED light source
External steam generation
Steaming without pressure
Hot air 30 °C to 230 °C can be combined with chosen humidity level of 0%, 30%, 60%, 80% or 100%
Sous-vide cooking with accurate temperature regulation
Full surface grill combinable with circulated air up to 230 °C and steam
Automatic programs
Core temperature probe with estimation of cooking time
TFT touch display
Panel-free appliance with surface control module
Electronic temperature control from 30 °C to 230 °C
Net volume 50 litres

Heating methods
 Hot air + 100 % humidity.
 Hot air + 80 % humidity.
 Hot air + 60 % humidity.
 Hot air + 30 % humidity.
 Hot air + 0 % humidity.
 Low temperature cooking.
 Sous-vide cooking.
 Full surface grill level 1 + humidity.
 Full surface grill level 2 + humidity.
 Full surface grill + circulated air.
 Dough proofing.
 Defrosting.
 Regenerating.

Handling
 Rotary knob and TFT touch display operation.
 Clear text display.
 Option to save individual recipes (incl. core temperature probe).
 Personalisation of automatic programs.
 Information key with use indicators.
 Side-opening door opens up to 110° angle.

Features
 Full surface grill 2 KW.
 2 removable 1.6 litre water tanks.
 Water level warning.
 Three-point core temperature probe with automatic shut-off and estimation of cooking time.
 Automatic programs.
 Actual temperature display.
 Timer functions: cooking time, cooking time end, timer, stopwatch, long-term timer.
 Automatic boiling point detection.
 LED light on the side.
 Hygienic stainless steel cooking interior.
 3 tray levels.
 Home network integration for digital services (Home Connect) either via cable connection LAN (recommended) or wireless via WiFi.
 The use of the Home Connect functionality depends on the Home Connect services, which are not available in every country. For further information please check: home-connect.com.

Safety
 Child lock.
 Safety shut-off.

Characteristics
Color / Material Front
 Anthracite
Built-in / Free-standing
 Built-in
Door opening
 Lateral
Required niche size for installation (HxWxD)
 450-450 x 560-560 x 550
Dimensions of the product (mm)
 455 x 590 x 540
Dimensions of the packed product (HxWxD) (mm)
 585 x 825 x 695
Control Panel Material
 without panel
Door Material
 Glass
Net weight (kg)
 53.164
Approval certificates
 Australia Standards, CE, Eurasian, G-Mark, Ukraine, VDE
Length electrical supply cord (cm)
 175
EAN code
 4242006278120

Consumption and connection features
Electrical connection rating (W)
Current (A)
 8
Voltage (V)
 220-240
Frequency (Hz)
 50
Plug type
 Gardy plug w/ earthing
Approval certificates
 Australia Standards, CE, Eurasian, G-Mark, Ukraine, VDE
Number of cavities (2010/30/EC)
 1
Usable volume (of cavity) - NEW (2010/30/EC)
 50
Energy efficiency class (2010/30/EC)
 A
Energy consumption per cycle conventional (2010/30/EC)
Energy consumption gas oven per cycle conventional (2010/30/EC)
Energy consumption per cycle forced air convection (2010/30/EC)
Energy consumption gas oven per cycle forced air convection (2010/30/EC)
Energy efficiency index (2010/30/EC)
 2019-08-23
 Page 1

Cooled housing with temperature protection.

Cleaning
 Cleaning aid.
 Descaling program for the steam generator.
 Drying function.
 Water tank, dishwasher-safe.
 Grease filter, dishwasher-safe.
 Strainer filter, removable.

Planning notes
 Door hinge not reversible.
 No other electrical appliances should be installed above the BS.
 The door panel surface of the appliance extends 21 mm from the furniture cavity.
 The outer edge of the door handle extends 72 mm from the furniture cavity.
 Necessary lateral gap between appliance door and furniture panel of min. 5 mm.
 Consider the overhang, incl. the door handle, when planning to open drawers next to the appliance.
 When planning a corner solution, pay attention to the 110° door opening angle.
 The mains socket needs to be planned outside the built-in niche.
 The LAN port can be found at the back on the lower left side.
 Special accessories (order as spare parts):
 part no. 17002490 Descaling tablets

Connection
 Total connected load 3.2 kW.
 Connecting cable 1.8 m with plug.
 Plan a LAN cable.
 Power consumption standby/display on 0.7 W.
 Power consumption standby/display off 0.5 W.
 Power consumption standby/network 1.2 W.
 Time auto-standby/display on 20 min.
 Time auto-standby/display off 20 min.
 Time auto-standby/network 20 min.
 Please check the user manual for how to switch off the WiFi module.


Color Variants
BSP250101
Full glass door in Gaggenau Anthracite
Width 60 cm
BSP250111
Full glass door in Gaggenau Metallic
Width 60 cm

Included accessories
 1 x grid.
 1 x pluggable meat probe.
 1 x STS tray.
 punched.
 40 mm deep.
 1 x STS tray.
 unpunched.

Optional accessories
BA020360
BA020370
BA020380
BA020390
BA030300


Product Variants
BSP251101
Combi-steam oven 200 series
Full glass door in Gaggenau Anthracite
Width 60 cm
left-hinged
Controls at the top

BSP250101
Combi-steam oven 200 series
Full glass door in Gaggenau Anthracite
Width 60 cm
right-hinged
Controls at the top
2019-08-23
Page 2

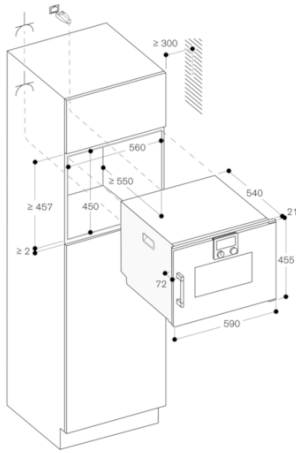

Socket
measurements in mm

Side view of BMP 250 over BOP

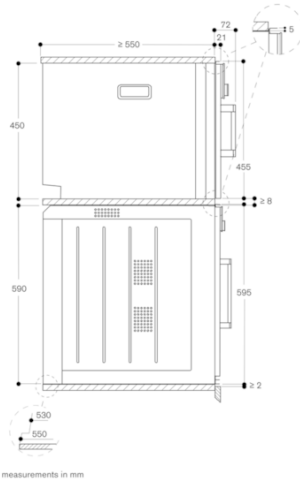

measurements in mm