



BSP251101
Combi-steam oven 200 series
Full glass door in Gaggenau Anthracite
Width 60 cm
left-hinged
Controls at the top

Color Variants

BSP251101
Full glass door in Gaggenau Anthracite
Width 60 cm
BSP251111
Full glass door in Gaggenau Metallic
Width 60 cm

Optional accessories

BA010301
3-level telescopic rails
GN340230

Product Variants

BSP250101
Combi-steam oven 200 series
Full glass door in Gaggenau Anthracite
Width 60 cm
right-hinged
Controls at the top

Flush installation
 Water tank for fresh and waste water
 Large cavity
 LED light source
 External steam generation
 Steaming without pressure
 Hot air 30 °C to 230 °C can be combined with chosen humidity level of 0%, 30%, 60%, 80% or 100%
 Sous-vide cooking with accurate temperature regulation
 Automatic programs
 Core temperature probe with estimation of cooking time
 TFT touch display
 Panel-free appliance with surface control module
 Electronic temperature control from 30 °C to 230 °C
 Net volume 50 litres

Heating methods

Hot air + 100 % humidity. Hot air + 80 % humidity. Hot air + 60 % humidity. Hot air + 30 % humidity. Hot air + 0 % humidity. Low temperature cooking. Sous-vide cooking. Full surface grill level 1 + humidity. Full surface grill level 2 + humidity. Full surface grill + circulated air. Dough proofing. Defrosting. Regenerating.

Handling

Rotary knob and TFT touch display operation.
 Clear text display.
 Option to save individual recipes (incl. core temperature probe).
 Personalisation of automatic programs.
 Information key with use indicators.
 Side-opening door opens up to 110° angle.

Features

2 removable 1.7 litre water tanks.
 Water level warning.
 Three-point core temperature probe with automatic shut-off and estimation of cooking time.
 Automatic programs.
 Actual temperature display.
 Timer functions: cooking time, cooking time end, timer, stopwatch, long-term timer.
 Automatic boiling point detection.
 LED light on the side.
 Hygienic stainless steel cooking interior.
 3 tray levels.
 Home network integration for digital services (Home Connect) either via cable connection LAN (recommended) or wireless via WiFi.
 The use of the Home Connect functionality depends on the Home Connect services, which are not available in every country. For further information please check: home-connect.com.

Safety

Child lock.
 Safety shut-off.
 Cooled housing with temperature protection.

Cleaning

Cleaning aid.
 Descaling program for the steam generator.
 Drying function.
 Water tank, dishwasher-safe.

Characteristics

Color / Material Front
 Anthracite
Built-in / Free-standing
 Built-in
Door opening
 Lateral
Required niche size for installation (HxWxD)
 450-450 x 560-560 x 550
Dimensions
 455 x 590 x 540
Dimensions of the packed product (HxWxD) (mm)
 590 x 660 x 690
Control Panel Material
 Glass
Door Material
 Glass
Net weight (kg)
 45.038
Approval certificates
 Australia Standards, CCC, CE, China, China ROHS 20, Eurasian, G-Mark, Ukraine, VDE
Length electrical supply cord (cm)
 175
EAN code
 4242006278137

Consumption and connection features

Electrical connection rating (W)
Current (A)
 16
Voltage (V)
 220-240
Frequency (Hz)
 50
Plug type
 Gardy plug w/ earthing, no plug
Approval certificates
 Australia Standards, CCC, CE, China, China ROHS 20, Eurasian, G-Mark, Ukraine, VDE

Number of cavities (2010/30/EC)

1
Usable volume (of cavity) - NEW (2010/30/EC)
 50
Energy efficiency rating
 A

Energy consumption per cycle conventional (2010/30/EC)

Energy consumption gas oven per cycle conventional (2010/30/EC)

Energy consumption per cycle forced air convection (2010/30/EC)
 0.72

Energy consumption gas oven per cycle forced air convection (2010/30/EC)

Energy efficiency index (2010/30/EC)
 94.7

2020-09-20

Page 1

Grease filter, dishwasher-safe.
 Strainer filter, removable.


Planning notes

Door hinge not reversible.
 No other electrical appliances should be installed above the BS.
 The door panel surface of the appliance extends 21 mm from the furniture cavity.
 The outer edge of the door handle extends 72 mm from the furniture cavity.
 Necessary lateral gap between appliance door and furniture panel of min. 5 mm.
 Consider the overhang, incl. the door handle, when planning to open drawers next to the appliance.
 When planning a corner solution, pay attention to the 110° door opening angle.
 The mains socket needs to be planned outside the built-in niche.
 The LAN port can be found at the back on the lower left side.

Connection


Total connected load 3.1 KW.
 Connecting cable 1.8 m without plug.
 Plan a LAN cable.
 Power consumption standby/display on 0.8 W.
 Power consumption standby/display off 0.5 W.
 Power consumption standby/network 1.8 W.
 Time auto-standby/display on 20 min.
 Time auto-standby/display off 20 min.
 Time auto-standby/network 20 min.
 Please check the user manual for how to switch off the WiFi module.

BSP251101
Combi-steam oven 200 series
Full glass door in Gaggenau Anthracite
Width 60 cm
left-hinged
Controls at the top
2020-09-20
Page 2

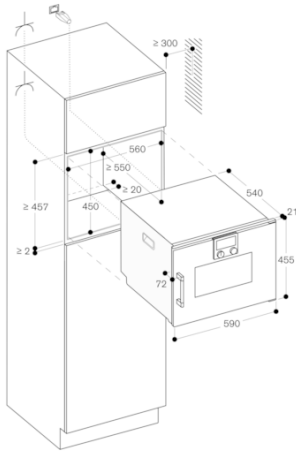

Socket
measurements in mm

Side view of BSP 220/250 above BOP

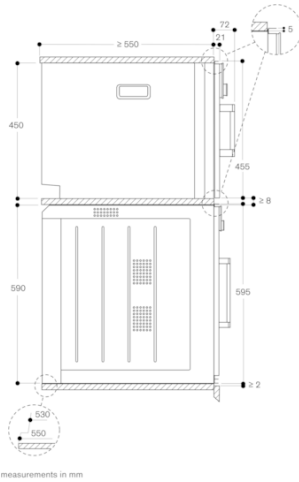

measurements in mm