


iQ700
EX675LYC1E
60 cm Induction cooktop

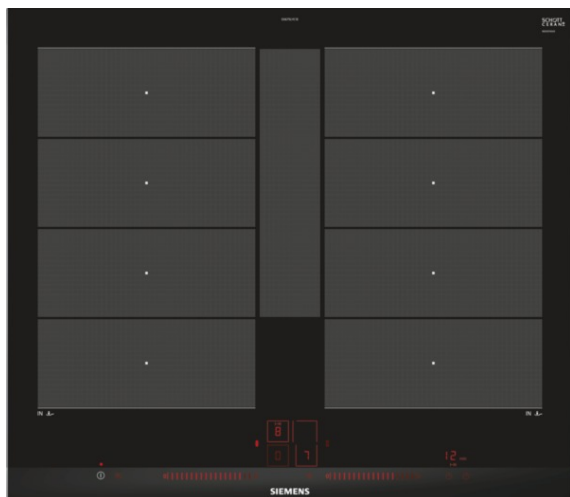

Induction cooktop with innovative features that enable highly flexible cooking in any situation.

- ✓ fryingSensor: maintains the desired pan temperature automatically after heating up to avoid scorching.
- ✓ dual lightSlider: lets you easily and intuitively operate the cooktop.
- ✓ powerMove Plus: enables intuitive control thanks to three heating zones with different temperatures – activated by touch.
- ✓ flexInduction Plus adapts the cooking zones to different cookware and pots up to 30 cm diameter – for more flexibility.

Features

Technical Data

Product name/family : Cooking zone ceramic
 Construction type : Built-in
 Energy input : Electric
 Total number of positions that can be used at the same time : 4
 Type of control setting devices : Dual light slider, illuminated
 Required niche size for installation (HxWxD) : 51 x 560-560 x 490-500
 Width of the product (mm) : 602
 Dimensions of the product (mm) : 51 x 602 x 520
 Net weight (kg) : 15.0
 Gross weight (kg) : 16.0
 Residual heat indicator : Separate
 Location of control panel : Hob front
 Basic surface material : Ceramic
 Color of surface : Black, Stainless steel
 Color of frame : Stainless steel
 Approval certificates : AENOR, CE
 Length electrical supply cord (cm) : 110
 EAN code : 4242003715291
 Electrical connection rating (W) : 7400
 Voltage (V) : 220-240
 Frequency (Hz) : 50; 60



4 242003 715291

Optional accessories

HZ390522	Griddle Plate
HZ390512	Teppan Yaki (large)
HZ390511	Teppan Yaki (small)
HZ390042	set of 3 pots + 1 pan for induction hob
HZ390012	Steaming rack for Induction roaster

iQ700

EX675LYC1E

60 cm Induction cooktop

Features

Cooktop Type and Special Features

- 4 induction cooking zones
- 2 Flex zones + extended Flex zone
- flexInduction Plus
- powerBoost function for all cooking zones
- panBoost
- fryingSensor Plus with 5 temperature settings

Design

- Black ceramic glass with stainless steel side profiles and beveled front
- New design (of printing)
- Can be combined with Domino cooktops

Comfort & Convenience

- Dual LightSlider
- LED display and timer with auto switch off for all cooking zones
- Count up timer per cooktop
- ReStart - Quickly reinstates previous settings
- QuickStart - Quick and automatic first pot detection
- flexMotion
- powerMove Plus

Size & Power

- 17 power levels for each cooking zone
- Cooking zones:
 - 1 x Ø 380 mmx225 mm, 3.3 KW (max. Power level 3.7 KW)
 - Induction or 2 x Ø 190 mm, 2.2 KW (max. Power level 3.7 KW)
 - Induction;
 - 1 x Ø 380 mmx225 mm, 3.3 KW (max. Power level 3.7 KW)
 - Induction or 2 x Ø 190 mm, 2.2 KW (max. Power level 3.7 KW)
 - Induction
- 7.4 kW total connected load

Safety and Environment

- Automatic pan recognition
- Automatic safety switch-off
- childproof lock
- 2-stage (h/H) digital residual heat indicator for each cooking zone
- Energy efficiency display

Dimensions (WxD)

- Installation measurements: 560 mmx490 mm
- Integrated cooling fan
- Length wire connection: 110 cm
- Min. worktop thickness: 30 mm

iQ700
EX675LYC1E
60 cm Induction cooktop

Dimensioned drawings

