VI422113
Vario flex induction cooktop 400 series
Width 38 cm

Can be combined perfectly with other Vario appliances of the 400 series
Stainless steel frame
Flex function for combining the rectangular cooking areas
Free positioning of cookware inside combined cooking areas
Frying sensor function for temperature control in pans
Easy control of all functions with bicoloured display
Solid stainless steel control knob
Precision crafting of 3 mm stainless steel
For surface mounting with a visible edge or for flush mounting

Color Variants

VI422113
Width 38 cm

Optional accessories

GP900003
Stainless steel frying sensor pan

Installation Accessories

VA420004
Connection strip for combination with other Vario appliances of the 400 series for flush mounting

VA420010
Connection strip for combination with other Vario appliances of the 400 series for surface mounting

Cooking zones

2 flex induction cooking areas 19x24 cm (2200 W, with booster 3700 W), linked together 38x24 cm (3300 W, with booster 3700 W).

Handling

Control knobs with illuminated ring, cooking zone and output level markings.
Electronic power control in 12 output levels.
User friendly control with bicoloured display (white / orange).

Features

Flex function for rectangular cooking areas.
Frying sensor function.
Booster function.
Stopwatch.
Short-term timer.
Options menu.

Safety

2-stage residual heat indicator.
Safety shut-off.

Planning notes

Depending on the type of installation (surface-mounted or flush-mounted), the specific location of the cut-out and the knob positions may vary.
The horizontal positioning of the knobs may be aligned with the specific cooking areas.
The drawing "Installation of the control knob" must be observed if the panel is more than 23 mm thick (there must be a recess at the rear).
If combining several Vario appliances of the 400 series, a connection strip VA 420 must be placed between the appliances. Depending on the type of installation, the corresponding connection strip must be provided.
The bearing capacity and stability, in the case of thin worktops in particular, must be supported using suitable substructures. Take into account the appliance weight and additional loads.
Additional instructions for flush mounting:
Installation is possible in worktops made of stone, synthetics or solid wood. Heat resistance and watertight sealing of the cut edges must be observed. Concerning other materials please consult the worktop manufacturer.
The groove must be continuous and even, so that uniform placing of the appliance on the gasket is ensured. Do not use discontinuous lining.

Characteristics

Product name/family
Vario/Domino cooking zone cera

Built-in / Free-standing
Built-in

Energy input
Electric

Total number of positions that can be used at the same time
2

Required niche size for installation (HxWxD)
57 x 360 x 490-500

Width of the appliance
380

Dimensions
57 x 380 x 520

Dimensions of the packed product (HxWxD) (mm)
120 x 580 x 600

Net weight (kg)
9.871

Gross weight (kg)
10.9

Residual heat indicator

Location of control panel
External control

Basic surface material
Ceramic

Color of surface
Black, Stainless steel

Color of frame
Stainless steel

Approval certificates
AENOR, CE

Length electrical supply cord (cm)
150

EAN code
4242006285029

Electrical connection rating (W)
3700

Gas connection rating (W)

Current (A)
16

Voltage (V)
220-240

Frequency (Hz)
50; 60

Consumption and connection features

The joint width may vary due to size tolerances of the combinations and of the worktop cut-out.
If installing several appliances in individual cut-outs allow for a division bar of minimum 50 mm between the individual cut-outs.
Operates with magnetic (induction) iron pots and pans only. For an optimal heat distribution, the use of sandwich bottom cookware is recommended.
Appliance can be snapped into the worktop from above.
Appliance weight: approx. 10.

Connection

Total connected load 3.7 KW.
Connecting cable 1.5 m without plug.

GAGGENAU

Installation of the control knob; flush installation

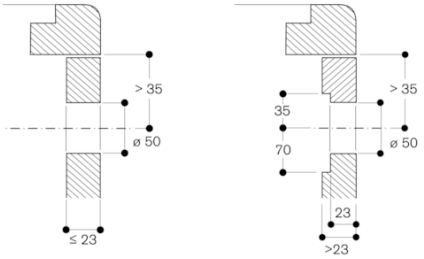

measurements in mm

Installation of the control knob; surface mounting

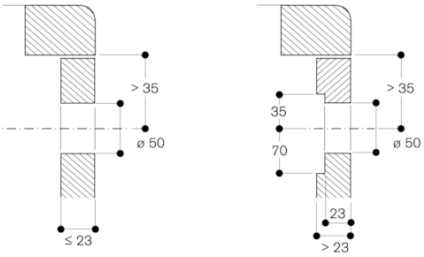

measurements in mm

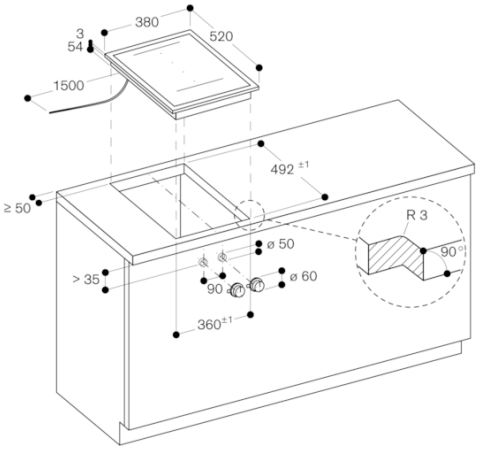

measurements in mm

View from above



measurements in mm

Cross-section

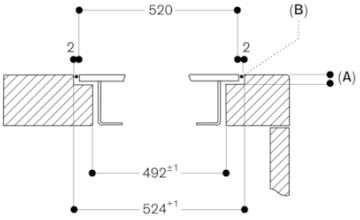

A: $3.5^{0.5}$
B: Fill with silicone

measurements in mm

Longitudinal section

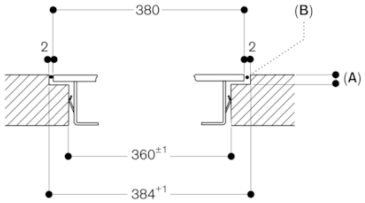

A: $3.5^{-0.5}$
B: Fill with silicone

measurements in mm