

520mm ONBOARD UNDERMOUNT RANGEHOOD with 'SMART-SWITCH' FUNCTION

SL926-DL 520



SMART/SWITCH



Rangehood type	Undermount
Control	Button
Speed settings	4
Ducting diameter	150mm
Extraction type	Onboard motor
Motor	Single aluminium motor
Extraction	Variable - see page 2
Filter	25mm stainless steel baffle
Lighting	6W LED strip - Dynamic and dimmable
Induction Countdown Control	Yes
Electrical requirement	10A
Dimensions (mm)	W520 x D290 x H350
Cut-out dimensions (mm)	W501 x D265
Warranty	3 years (6 years when Sirius ducting is used)



BI-POWER MODE



ECO-FRIENDLY
POWER USE




SINGLE
ALUMINIUM
MOTOR




25mm BAFFLE
FILTERS



DYNAMIC
LIGHTING




LOW NOISE
LEVEL



INDUCTION
COUNTDOWN
CONTROL



HANDCRAFTED
IN ITALY

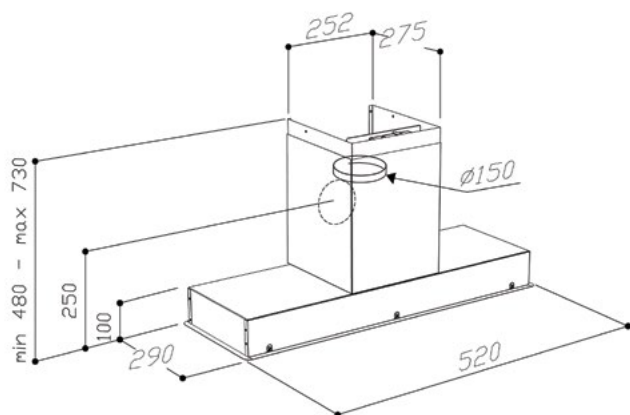


*Product dimension includes trim


Extra-space 'T-shape' design allows for extra cupboard storage.

Rangehood can be rear-vented.

Ducting options

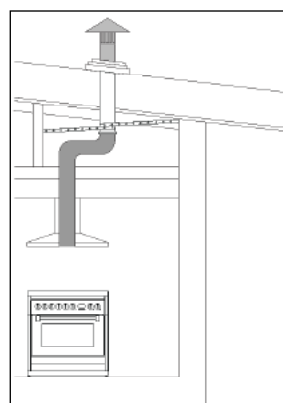

Roof ducted

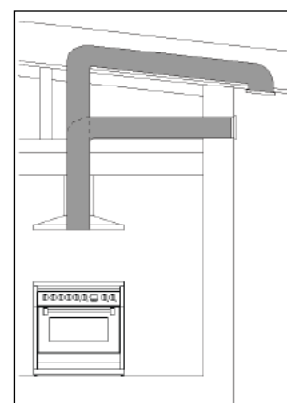

Eave or Wall ducted

- Use semi-rigid or rigid ducting, not fully flexible foil ducting.
- Fewer bends means a quieter and more powerful extraction.
- Extra 3 years warranty when Sirius ducting is used (total 6 years).
- See [support page](#) on Sirius website for installation videos and FAQs.

WARNING: technical specifications and product sizes can be varied by the manufacturer, without notice. Cut outs for appliances should only be by physical product measurements. The above information is indicative only.

Distributed by Arisit Pty Ltd

40-50 Mark Anthony Drive, Dandenong South VIC 3175

Ph: 1300 762 219

Fax: 03 9768 0838

Website: www.arisit.com

www.siriusbrand.com

BI-POWER mode


The new **Smart-Switch BI-POWER** feature is designed to offer the user a rangehood with the option for significant energy saving and noise reduction, specifically for cooking that does not require high-powered extraction performances.

Activating the **Smart-Switch BI-POWER** increases the airflow of the hood for when a more powerful extraction is required.



SL926 DL 520: ECO mode

Speed	Airflow	Power	Noise
1	221m ³ /h	60W	32dbA
2	320m ³ /h	65W	40dbA
3	491m ³ /h	75W	49dbA
4	755m ³ /h	130W	53dbA

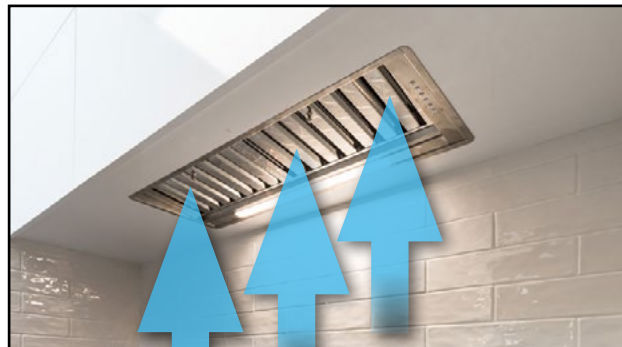


SL926 DL 520: POWER mode

Speed	Airflow	Power	Noise
1	308m ³ /h	105W	34dbA
2	467m ³ /h	130W	43dbA
3	677m ³ /h	165W	52dbA
4	1020m ³ /h	260W	58dbA



SIRIUS APP

The **Sirius Smart-Switch** rangehood is compatible with the Sirius app, allowing the user to control the rangehood with their mobile phone and Wi-Fi. The app is available for download from the Apple App store or the Google Play store.

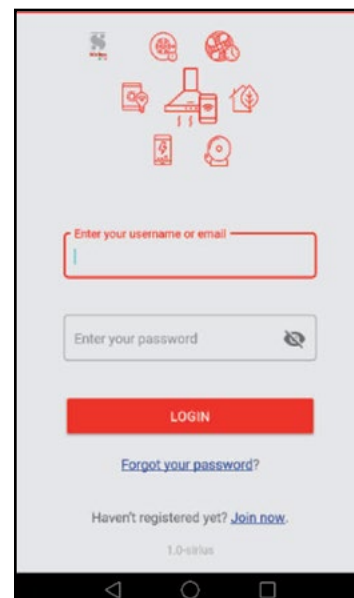

FEATURES

- Fan speed control and BI-POWER mode:**
 Allows you to control the rangehood fan speed, and to switch between 'ECO' and 'BI-POWER' modes.
- Custom auto shut-off timer:**
 Extend your automatic shut-off timer to a time that suits your cooking needs (up to 2 hours).
- Clean filter indicator:**
 Alerts you to how many hours left of rangehood use you have before it is time to clean the baffle filters in your dishwasher.
- Lighting adjustment:**
 Adjust the brightness and warmth (Kelvin) of the LED light.