

# FISHER & PAYKEL

## PRELIMINARY SPECIFICATION GUIDE

## FREESTANDING FRENCH DOOR REFRIGERATOR, 90CM



### OVERVIEW

This French Door Refrigerator Freezer has recessed handles and flat doors for a streamlined look to fit any kitchen aesthetic. Available in elegant matte black glass or stylish stainless steel, choose the finish that best complements your kitchen design. Easily-adjustable shelving in the fridge and full extension bins in the freezer provide storage flexibility, while ActiveSmart™ technology adjusts temperature and humidity to keep food fresher for longer.

### SERIES 7 MODELS

#### Freestanding French Door Refrigerator Freezer, 90cm, 614L, Ice & Water, Stainless Steel, Contemporary Style

RF610ANUX5 FP AA  
RF540ANUX5 FP UK

#### Freestanding French Door Refrigerator Freezer, 90cm, 614L, Ice & Water, Black Stainless Steel, Contemporary Style

RF610ANUB5 FP AA

#### Freestanding French Door Refrigerator Freezer, 90cm, 614L, Ice & Water, Black Matte Glass, Minimal Style

RF610AZUB5 FP AA  
RF540AZUB5 FP UK

### FEATURES

- ① Designed to match flush kitchen cabinetry.
- ② Easy to access touch-control panel.
- ③ ActiveSmart™ helps keep food fresher for longer.
- ④ Automatic ice maker and slimline water dispenser available.
- ⑤ Easily-adjustable shelving in the fridge.
- ⑥ Humidity-controlled vegetable bins.
- ⑦ Two independent easy-slide drawers in the freezer.
- ⑧ Solid glass and aluminium trims for interior shelving.
- ⑨ Choice of black matte glass or stylish stainless steel finish.
- ⑩ Recessed handle doors for a streamlined look.
- ⑪ Can be mounted flush with kitchen cabinetry or with the doors proud to minimise gaps around the product.

### ACCESSORIES

- ① Water Filter 847200

# FISHER & PAYKEL


## PRELIMINARY SPECIFICATION GUIDE

## FREESTANDING FRENCH DOOR REFRIGERATOR, 90CM

### PRODUCT SPECIFICATIONS


<b>Model No.</b>	RF610AZUB5, RF540AZUB5
<b>Dimensions</b>	H 1790mm W 900mm D 699mm
<b>Weight</b>	125kg
<b>Electrical</b>	
<b>Supply</b>	220 - 240VAC, 50Hz
<b>Service</b>	1.8-amp circuit
<b>Receptacle</b>	3-prong grounding type
<b>Plumbing</b>	
<b>Supply</b>	Water Connection Kit: 3.5m tubing with tap adaptor
<b>Pressure</b>	Min 150kPa (22psi), max 827kPa (120psi) @ 20°C

### PLUMBING AND ELECTRICAL

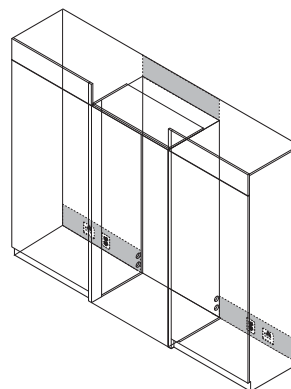

Note: Electrical connection should be located in an adjacent cabinet to either side of the fridge or above the fridge cavity. We recommend to use an isolating switch that is easily accessible to the user after the refrigerator is installed.

### PRODUCT DIMENSIONS

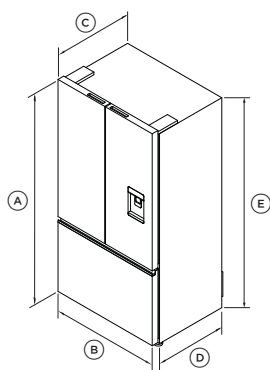

ISO VIEW


	mm
(A) Overall height	1790
(B) Overall width	900
(C) Overall depth*	699
(D) Depth of chassis**	626
(E) Height to top of chassis	1762
Depth of door opening***	1084

\* includes doors

\*\* excludes doors

\*\*\* not illustrated

### CAVITY DIMENSIONS: STANDARD INSTALLATION

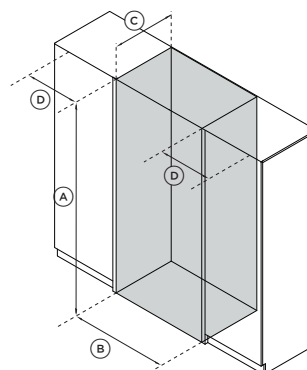

ISO VIEW

	mm
(A) Overall internal height	1825
(B) Overall width	
• proud	945
• flush	940
(C) Overall depth	
• proud	640
• flush	620
(D) Door clearance to side wall	
• proud*	235
• flush*	135

\*Full rotation

Includes minimum air clearance requirements

# FISHER & PAYKEL


## PRELIMINARY SPECIFICATION GUIDE

## FREESTANDING FRENCH DOOR REFRIGERATOR, 90CM

### PRODUCT SPECIFICATIONS


<b>Model No.</b>	RF610ANUX5, RF610ANUB5, RF540ANUX5
<b>Dimensions</b>	H 1790mm W 900mm D 695mm
<b>Weight</b>	113kg
<b>Electrical</b>	
<b>Supply</b>	220 - 240VAC, 50Hz
<b>Service</b>	1.8-amp circuit
<b>Receptacle</b>	3-prong grounding-type
<b>Plumbing</b>	
<b>Supply</b>	Water Connection Kit: 3.5m tubing
<b>Pressure</b>	Min 150kPa (22psi), max 827kPa (120psi) @ 20°C

### ELECTRICAL

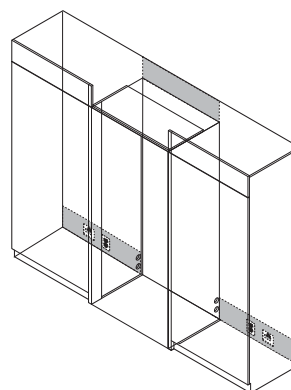

Note: Electrical connection should be located in an adjacent cabinet to either side of the fridge or above the fridge cavity. We recommend to use an isolating switch that is easily accessible to the user after the refrigerator is installed.

### PRODUCT DIMENSIONS

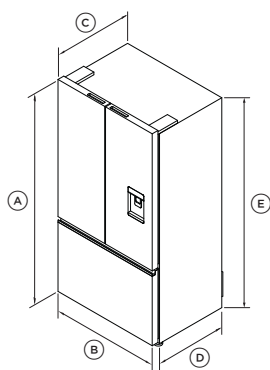

ISO VIEW


	mm
(A) Overall height	1790
(B) Overall width	900
(C) Overall depth*	695
(D) Depth of chassis**	626
(E) Height to top of chassis	1762
Depth of door opening***	1084

\*Includes doors

\*\*Excludes doors

\*\*\*Not illustrated

### CAVITY DIMENSIONS: STANDARD INSTALLATION

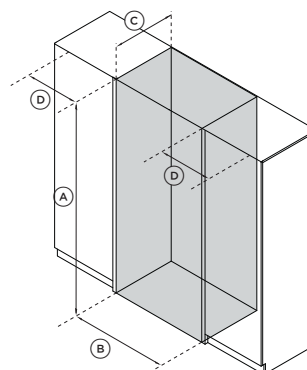

ISO VIEW

	mm
(A) Overall internal height	1825
(B) Overall width	
• proud	945
• flush	940
(C) Overall depth	
• proud	640
• flush	620
(D) Door clearance to side wall	
• proud*	235
• flush*	135

\*Full rotation

Includes minimum air clearance requirements