HWF85AN1

Front Loader Washing Machine, 8.5kg

This front loader not only has 4.5 star water and 4 star energy ratings, it includes specialised functions such as Sanitise, Refresh and a super-fast Express 15 cycle. +Garment adds everyday convenience, with forgotten items able to be added after the wash cycle has started.



FEATURES

- Sanitise is a high-temperature solution, killing bacteria for more hygienic washing.
- The short Refresh cycle uses steam technology to refresh folded and stored clothes.
- The Speed up function effectively reduces the time of most wash cycles, and is perfect for lightly-soiled clothes.
- A super-fast Express 15 cycle is perfect for busy lives and lightly soiled clothes.
- The convenient +Garment lets you add in any forgotten items, even when the wash has already started.
- Anti-Bacteria Treatment (ABT) in the gasket and laundry detergent dispenser helps keep your laundry environment hygienic.
- WiFi-enabled for future compatibility with remote access and smart home appliances.

Haier



ACCESSORY

- Hose set provided
- Noise reduction pads
- User manual

ELECTRICAL

Service

- Supply
 - 10-amp circuit
 - Connection 3-prong grounding-type

220V-240V, 50Hz


PLUMBING PRESSURE

• Max. 1MPa (150psi) Min. 30KPa (4.5psi), Min. 6 litres/min


The models shown in this Specification Guide (SG) may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This SG should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available with the product on delivery and on our website haier.com

Product overview


PRODUCT DIMENSIONS



		mm
A	Overall height	850
В	Overall width	595
с	Overall depth	610
D	Depth with door opened	1084
E	Min. Door Clearance to adj. wall	260



CAVITY DIMENSIONS

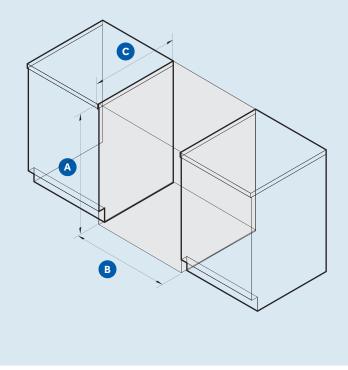

		mm
A	Overall height	870
В	Overall width	635
с	Min. overall cav flush with front panel	550
	Min. gap clearance to adj. product or wall	20

The models shown in this Specification Guide (SG) may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This SG should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available with the product on delivery and on our website haier.com