



# HYDROTAP G5 C ELITE PLUS BRUSHED NICKEL



CHILLED

FILTERED

## Order Code H5E788Z11AU

Zip HydroTap Design Range Chilled, Filtered water system features a single under bench command centre including full colour interactive touch screen display with pin code protection and customisable settings including 2 energy saving modes including ON/OFF timers and 2 hour sleep mode, 'Quiet' mode with automated intelligent fan speed adjustment, SteriTouch® antimicrobial protection impregnated into key water paths for enhanced hygiene, 100% water efficient air cooled technology, and 0.2 micron water filtration.



Manufacturing Code	H5E788Z11AU
--------------------	-------------

Capacity	Residential
----------	-------------






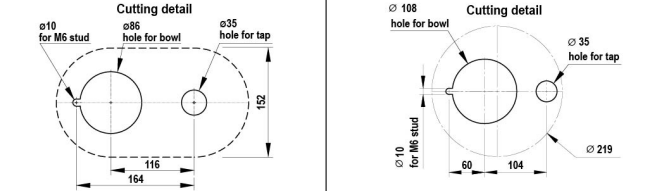
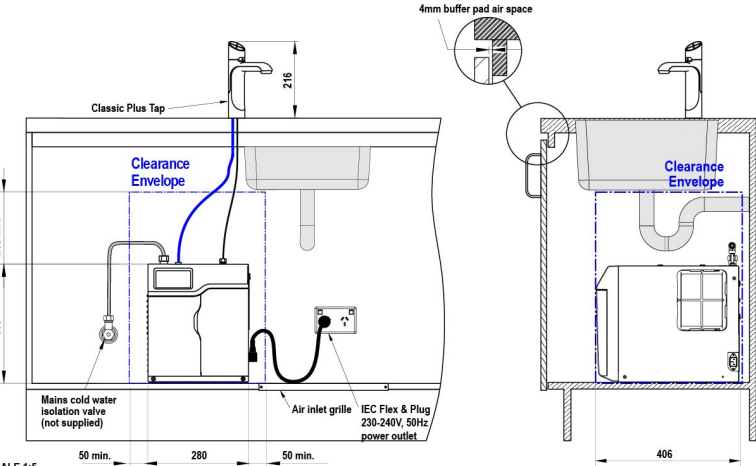
Tap	Zip HydroTap Design Range ELITE PLUS Tap (Brushed Nickel)
Water Pressure	Min 250kPa - Max 700kPa
Water Connection	1/2" BSP (G1/2)
Water Supply Requirements	Cold
Water Valves	Integrated 500kPa Pressure limiting valve and Dual Check Valve
Power Rating	0.17kW 220-240V 50Hz
Power Supply	1 x 10 Amp socket outlet
Dimensions	W280mm x D406mm x H333mm
Product Approvals	WaterMark, RCM, ARC
Warranty	5 years (appliance warranty 36 months plus additional 24 months tank warranty)

# Installation Requirements

1. Installation and connection of your Zip HydroTap must be carried out by a qualified person, observing national and local regulations.
2. You will require suitable mains electrical and drinking water connections, plus waste water drainage all within 1.5 metres of the product.
3. HydroTap is air-cooled so discrete cabinetry cut-outs are required for ventilation.
4. Installation on most bench tops is straightforward however some stone bench tops may require a specialised cutting service.
5. If you live in a hard water area, we recommend installation of a Zip scale filtration kit.
6. Installation by Zip Professional Service can be arranged with a phone call or through [www.zipwater.com](http://www.zipwater.com)

## Installation Detail

BKL2 HydroTap G5 v1.00 02.21

Ventilation requirements <small>Contact your local service provider if ventilation is not suitable</small>	HydroTap Tap options	Font options	
<p><b>Clearance envelope</b> Position the Tap and the Command Centre as close together as possible.</p>  <p>200 333 50 Command Centre width</p>	<p><b>Classic Plus</b>      <b>Elite Plus</b></p>  <p>116      110 216      221 126      135 ∅46      ∅46</p>	<p><b>Raised Font with 135mm Extension</b></p>  <p>116      ∅46 260      351 116      20 268</p> <p><b>Font with 135mm Extension</b></p>  <p>116      ∅46 260      351 104      6 ∅219</p>	
 <p><b>Air outlet louvre (if required)</b> Cut-out in door/wall, towards the top of the cabinet</p> <p><b>Air inlet cut-out (required)</b> Cut-out in cabinet floor</p> <p>285      60 max. 43      326</p>	<p><b>Tap Positioning</b> Position the Tap to dispense into the sink, allowing clearance for a cup or teapot. Alternatively, mount the HydroTap Tap on a Font (available as an accessory).</p> <p>∅35mm hole for HydroTap Tap</p> <p>Sink</p> <p><b>Cutting detail</b></p>  <p>∅10 for M6 stud      ∅86 hole for bowl      ∅35 hole for tap 152 116      164</p> <p>∅108 hole for bowl      ∅35 hole for tap ∅10 for M6 stud      60      104      ∅219</p>		
 <p>4mm buffer pad air space</p> <p>Classic Plus Tap      216</p> <p>Clearance Envelope</p> <p>200 min. 333</p> <p>Mains cold water isolation valve (not supplied)      IEC Flex &amp; Plug 230-240V, 50Hz power outlet</p> <p>50 min.      280      50 min.</p> <p>406</p> <p><b>HydroTap G5 C Home</b> shown with "Classic Plus" Tap</p> <p>SCALE 1:5 ALL DIMENSIONS IN MM UNLESS OTHERWISE SPECIFIED. INSTALLATION DIAGRAMS ARE FOR ILLUSTRATIVE PURPOSES ONLY. HOSES ARE NOT SHOWN TO SCALE AND CANNOT BE LENGTHENED.</p>			

