




Product Features


Motor Type	Off Board Motor
Dimensions	851(W) x 351(H) x 360(D)mm Suits 75cm-110cm Cooking Surfaces
Cut-Out	824 x 330mm
Filtration Type	2 x Baffle Filters
Lighting Type	Dynamic LED Strip
Finish	304 Stainless Steel
Install	Flush Frame
Controls	Touch Control
Speed Settings	3 Speed + Boost
Timer Function	15 Min Auto Shut-Off
Ducting	200mm Circular Outlet + 6m of Flexible Ducting Supplied
Installation Info	Quick Install Clips
Remote Control	Optional
Grease Filter Alarm	Yes
Dishwasher Safe Filters	Yes
Auto Cooking Sensor	Yes

Dimensioned Drawings

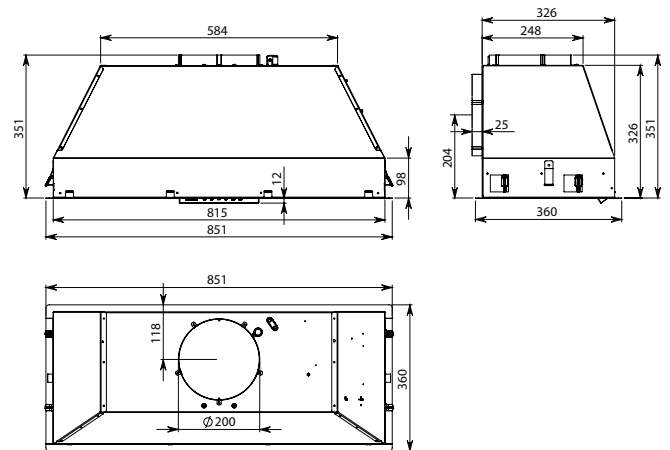

Model Code	Motor Output	Motor Solution
FP3MLD90S2-IR1140	1140m ³ /hr	In Roof Motor
FP3MLD90S2-ER1140	1140m ³ /hr	External Roof Motor
FP3MLD90S2-EW1140	1140m ³ /hr	External Wall Motor
FP3MLD90S2-ER2010	2010m ³ /hr	External Roof Motor
FP3MLD90S2-EW2010	2010m ³ /hr	External Wall

Charts: Air flow 50 Hz

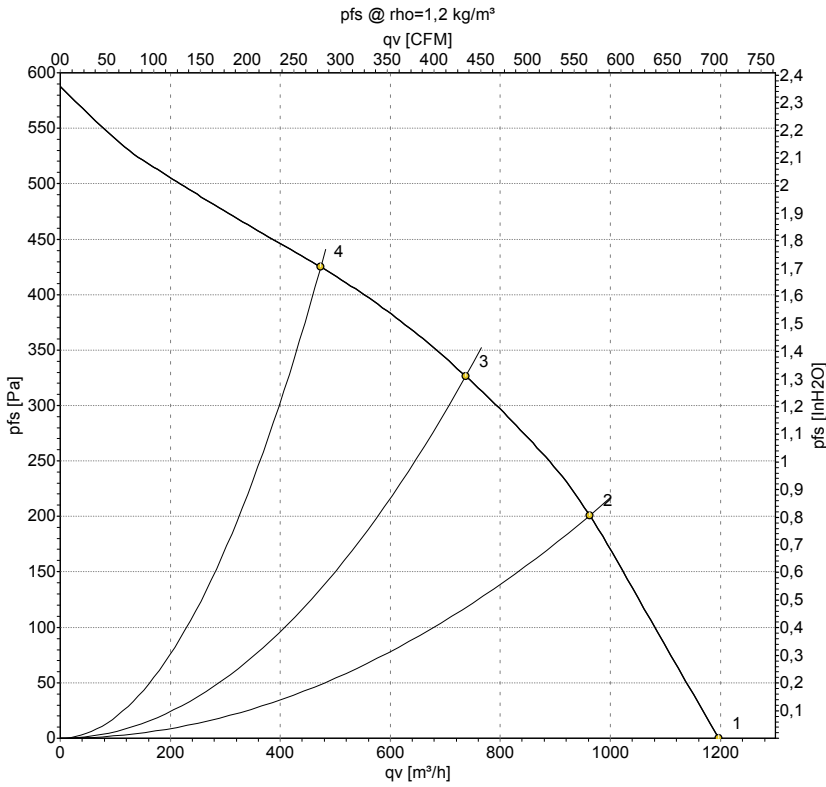

Measurement: LU-154575

Air performance measured as per ISO 5801 Installation category A. For detailed information on the measuring set-up, please contact ebm-papst. Suction-side noise levels: LwA measured as per ISO 13347 / LpA measured with 1m distance to fan axis. The values given are valid under the measuring conditions mentioned above and may vary according to the actual installation situation. With any deviation from the standard set-up, the specific values have to be checked and reviewed with the unit installed.


Measured values

	U	f	n	P _e	I	qv	p _{fs}
	V	Hz	min ⁻¹	W	A	m³/h	Pa
1	230	50	2660	130	0.57	1195	0
2	230	50	2500	155	0.68	965	200
3	230	50	2560	150	0.65	735	325
4	230	50	2615	139	0.61	475	425

U = Supply voltage · f = Frequency · n = Speed · P_e = Power input · I = Current draw · LpA_{in} = Sound pressure level inlet side · LwA_{in} = Sound power level inlet side · qv = Air flow
 p_{fs} = Pressure increase



Curves: Air performance 50 Hz

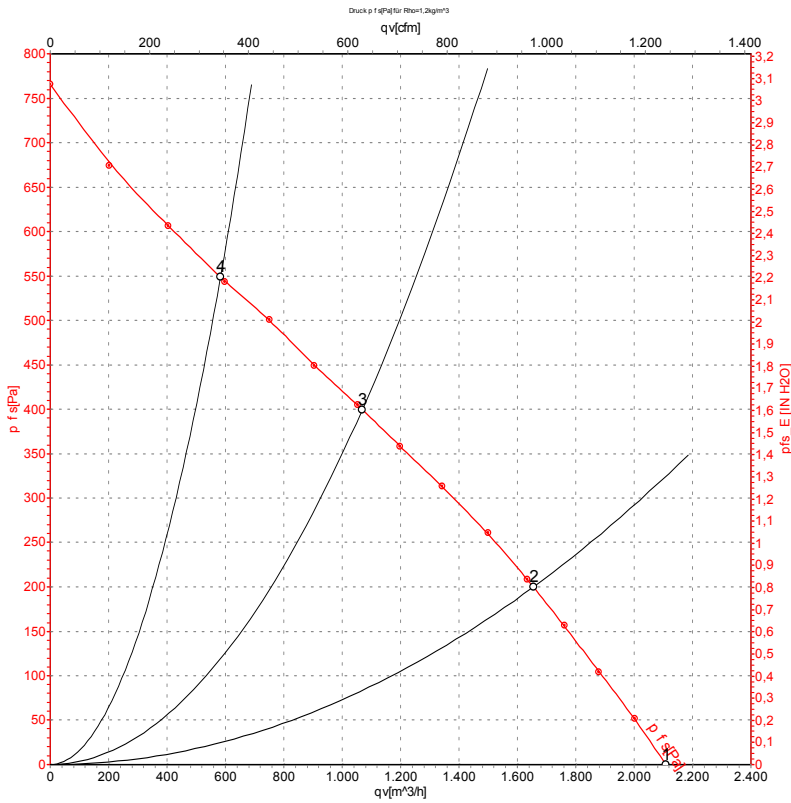

Measurement: LU-107236-1

Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebm-papst. Intake sound level: Sound power level according to ISO 13347 / sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions of installation. For deviations from the standard configuration, the parameters have to be checked on the installed unit.

Measured values

	U	f	n	P _e	I	q _V	P _{fs}	q _V	P _{fs}
	V	Hz	min ⁻¹	W	A	m ³ /h	Pa	cfm	in. wg
1	230	50	2700	225	1.00	2110	0	1240	0.00
2	230	50	2510	289	1.26	1655	200	975	0.80
3	230	50	2365	324	1.42	1070	400	630	1.61
4	230	50	2490	291	1.27	585	550	345	2.21

U = Voltage · f = Frequency · n = Speed (rpm) · P_e = Power consumption · I = Current draw · q_V = Air flow · p_{fs} = Pressure increase