

**Serie | 4 Hoods**
**DFS067A50A**  
**60 cm Slideout Rangehood**
**A**


**The slideout rangehood practically disappears into your upper cabinet, giving you a sleek kitchen finish.**

- **Extraction rate:** at 740 m<sup>3</sup>/h, it quickly ensures optimal kitchen air quality.
- **LED lighting:** for perfect, energy-efficient illumination of the cooktop.
- **Intensive speed setting with reset:** automatically resets the hood to regular speed setting after 6 min.
- **Especially quiet:** high performance at just 55 dB.
- **Especially quiet:** high performance at just 55 dB.

**Technical Data**

Typology :	Pull-out
Approval certificates :	CE, VDE
Length electrical supply cord (cm) :	175
Required niche size for installation (HxWxD) :	385mm x 524mm x 290mm
Net weight (kg) :	11.0
Type of control :	Electronic
Maximum output air extraction (m <sup>3</sup> /h) :	400
Boost position output recirculating (m <sup>3</sup> /h) :	490
Maximum output recirculating air (m <sup>3</sup> /h) :	300
Boost position air extraction (m <sup>3</sup> /h) :	740
Number of lights :	2
Noise level (dB) :	55
Diameter of air outlet (mm) :	150 / 120
Grease filter material :	Washable aluminium
Odour filter :	No
Operating Mode :	Convertible
Delay Shut off modes :	10M
Optional accessories :	
DSZ4561, DSZ4565, DSZ4660, DSZ4681, DSZ4683, DWZ0IT0P0	
Type of lamps used :	LED
Total power of the lamps (W) :	6
Grease filter type :	Kassette
Connection Rating (W) :	146
Current (A) :	10
Voltage (V) :	220-240
Frequency (Hz) :	50
Plug type :	AU plug
Installation typology :	Built-in
Material body :	zinc plated
Approval certificates :	CE, VDE
Plug type :	AU plug
Dimensions of the product, with chimney (if exists) (in) :	/ x x
Dimensions of the packed product (in) :	15.74 x 25.19 x 18.89
Net weight (lbs) :	24
Gross weight (lbs) :	27
Motor location :	Integrated motor in hood body
No-return airflow flap :	No
Length electrical supply cord (cm) :	175
Dimensions of the product, with chimney (if exists) (mm) :	426 x 598 x 290
Dimensions of the packed product (HxWxD) (mm) :	400 x 640 x 480
Net weight (kg) :	11.0
Gross weight (kg) :	12.0



4 242005 058044

**Optional accessories**

DSZ4561 Active carbon filter, DSZ4565 Recirculating kit, DSZ4660 Lowering frame, DSZ4681 CleanAir active carbon filter, DSZ4683 CleanAir Recirculation Kit, DWZ0IT0P0 CleanAir<sup>1/3</sup>

## Serie | 4 Hoods

### DFS067A50A

### 60 cm Slideout Rangehood

**The slideout rangehood practically disappears into your upper cabinet, giving you a sleek kitchen finish.**

---

#### Power and Mode of Operation

- Maximum extraction 740 m<sup>3</sup>/h
- 3 power settings plus intensive setting
- Ducted and recirculated-air operation
- Accessories required for recirculation mode: CleanAir Module

#### Design & Innovation

- Appliance colour: Steel body, metallic finish
- Stainless steel fascia panel/pelmet included
- Electronic controls with low-lift push buttons
- 2 x 3 Watt LED Lights

#### Convenience

- Intensive operation automatic revert - 6min
- Automatic run on - 10 min
- Noise min./max. Normal Level: 43/55 dB  
Noise max. Intensive setting: 68 dB
- Easy installation system

#### Cleaning

- Dishwasher safe metal grease filters

#### Safety and Quality

- EcoSilence BLDC brushless motor
- 2 year warranty

#### Dimensions (HxWxD)


- Appliance dimensions (HxWxD): 426 x 598 x 290 mm
- Built-in dimensions (HxWxD): 385 x 524 x 290 mm

#### Technical Information


- Noise level according to EN 60704-3 und EN 60704-2-13  
exhaust air:  
Max. normal use: 55 dB(A) re 1 pW (41 dB(A) re 20 µPa sound pressure)  
Intensive: 68 dB(A) re 1 pW (54 dB(A) re 20 µPa sound pressure)
- Power rating: 146 W
- Average Energy Consumption: 35.3 kWh/year
- Diameter pipe Ø 150 mm (Ø 120 mm enclosed)
- Install into a 60cm wide wall cupboard

Serie | 4 Hoods


**DFS067A50A**  
**60 cm Slideout Rangehood**

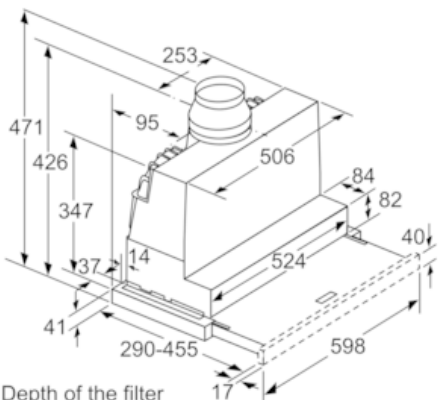


Depth of the filter drawer can be adjusted by up to 29 mm  
 measurements in mm

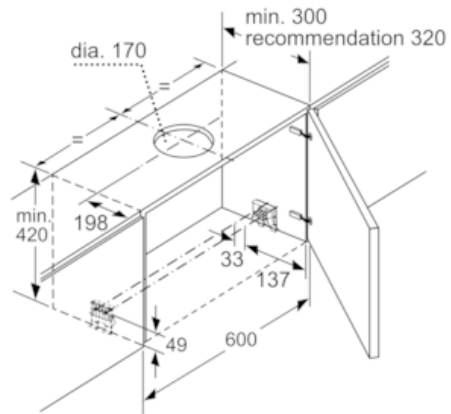


measurements in mm

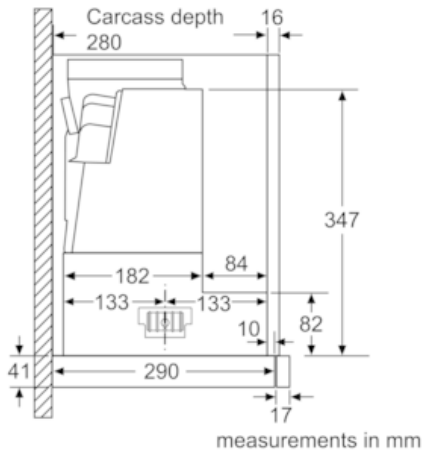


measurements in mm

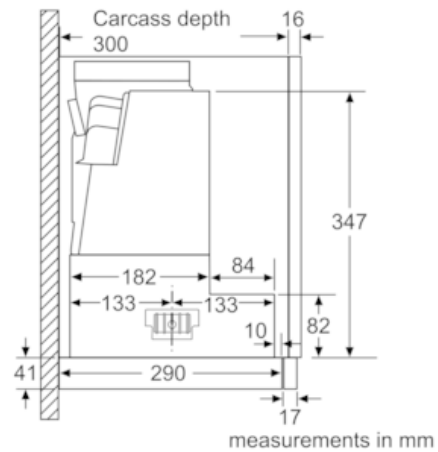

measurements in mm

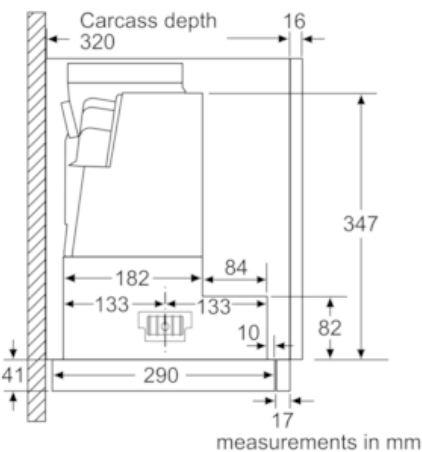

measurements in mm

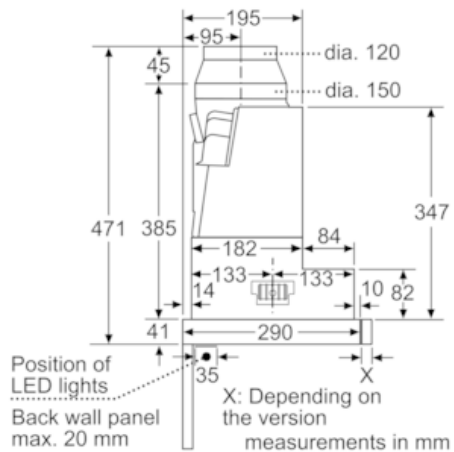

measurements in mm