


KM 7897-2 FL Diamond

Induction cooktop with onset controls

with Diamond coating finish; a robust coating ensures your cooktop stays looking new for longer.

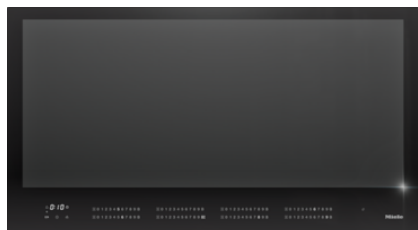


- Diamond coating finish
 - DiamondFinish
- Intelligent pan recognition – for up to 6 pans
- Intuitive quick select w. numerical keybank – Smart Select White
- Communication with the rangehood – automatic Con@ctivity function
- Frameless for flush-fit or surface-mounted installation

Heating type	
Heating type	Induction
Construction type	
Independent of cooker	•
Design	
Elegant glass ceramic surface	•
Ceramic surface colour	Graphite black
Print design	Silent Move
Flush	•
Surface-mounted installation	•
Cooking zone details	
Number of cooking areas	1
Maximum number of pans	6
1st cooking zone/cooking area	
Position	Can be selected freely
Type	Full area
Size in mm	870 x 380
Max. rating in W	2600
Max. Booster power rating in W	3300
Max. TwinBooster power rating in W	3650
User convenience	
Networking with Miele@home	•
Automatic function Con@ctivity 3.0	•
Operation via sensor controls	Smart Select White
Display colour	White
Pan and pan size recognition	•
Intelligent pan recognition	•
Positioning aid	•
Stop & Go function	•
Wipe protection	•
Recall function	•
Minute minder	•
Safety switch-off	•
Auto Heat-up	•
Keeping warm	•
Individual setting options (e.g. buzzers)	•
Efficiency and sustainability	
Power rating in off mode in W	0.5
Power rating in standby mode in W	1
Power rating in networked standby in W	2
Time until automatic switch to off mode in min	20
Time until automatic switch to standby in min	20
Time until automatic switch to networked standby in min	20
Cleaning convenience	
Easy-to-clean ceramic glass	•

KM 7897-2 FL Diamond

Induction cooktop with onset controls

with Diamond coating finish; a robust coating ensures your cooktop stays looking new for longer.

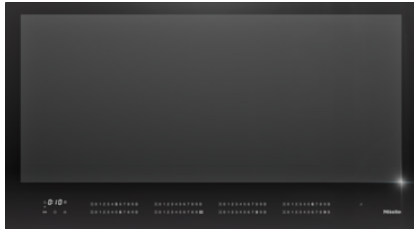

Safety	
Safety switch-off	•
Lock function	•
System lock	•
Integrated cooling fan	•
Overheating protection	•
Residual heat indicator	•
Technical data	
Internal cutout dimensions in mm (width) with flush installation	916
Internal cutout dimensions in mm (depth) with flush installation	500
External cutout dimensions in mm (width) with flush installation	940
External cutout dimensions in mm (depth) with flush installation	524
Total rated load in kW	9.2
Voltage in V	230
Frequency in Hz	50-60
Standard accessories	
Mains cable	•