



Heating Functions

- Compact steamer with 4 heating methods:
 - Pure steaming
 - Reheating
 - Dough Proving
 - Defrost
- Temperature range 30 °C - 100 °C
- Cavity volume: 38 net usable litres

Design

- Illuminated ShiftControl
- Stainless steel cavity with 4 shelf positions

Cleaning

- Full glass inner door - safer touch door

Convenience

- 2.5" colour and text Display with ShiftControl
- Temperature proposal
- Optical temperature control
- Actual temperature display
- Additional functions:
 - Descaling programme
- Drop down door, SoftMove oven door with soft open and soft close, soft open
- Supporting systems: Programs
- Number of automatic programmes: 20 PC
- Electronic clock
- Round lamp
- Large 1.3 litre water tank
- Water tank empty indicator
- Stainless steel cavity
- Cooling fan
- Info button
- Bar handle

Hook-in racks / rails

- Cavity with shelf support rails, Telescopic slide-out
- Not available

Accessories

- 1 x steam container, punched, size L, 1 x steam container, unpunched, size L, 1 x sponge

Safety and Environment


- Individual adjustable child lock
- Safety switch off
- Triple glazed door

Technical Info

- Length of mains cable: 120 cm
- Total connected load electric: 1.9 KW
- Appliance dimensions (HxWxD): 455 mm x 596 mm x 548 mm
- Installation dimensions (HxWxD): 450 mm - 455 mm x 560 mm - 568 mm x 550 mm
- Please reference the built-in dimensions provided in the installation drawing

Compact steamer C17DR02N0, Stainless steel

Installation with a hob.

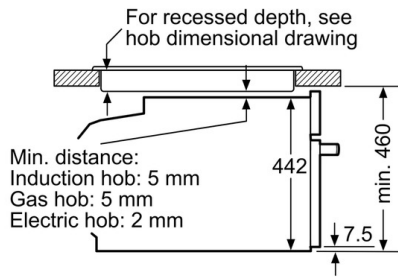

measurements in mm

If the compact appliance will be installed underneath a hob, the following worktop thicknesses (including substructure if necessary) must be taken into account.

Hob type	min. worktop thickness	
	fitted	flush
Induction hob	42 mm	43 mm
Full surface induction hob	48 mm	53 mm
Gas hob	37 mm	47 mm
Electric hob	28 mm	30 mm

Characteristics

Color / Material Front : Stainless steel
 Built-in / Free-standing : Built-in
 Required niche size for installation (HxWxD) : 450 x 560 x 550
 Dimensions of the product (mm) : 455 x 596 x 548
 Control Panel Material : Stainless steel
 Door Material : Glass
 Net weight (kg) : 25.0
 Approval certificates : CE, VDE
 Length electrical supply cord (cm) : 120

Consumption and connection features

Current (A) : 10
 Voltage (V) : 220-240
 Frequency (Hz) : 60; 50
 Plug type : Gardy plug w/ earthing
 Approval certificates : CE, VDE
 2016-01-05

Alternative colors available

C17DR02N0:Stainless steel

Optional accessories

Z11GT10X0 Glass roasting dish, 5,1l
 Z11SZ00X0 SeamlessCombination mounting kit
 Z11SZ60X0 SeamlessCombination 45 + 14cm
 Z11SZ90X0 SeamlessCombination 60 + 45cm
 Z13CU30X0 Steam container, unpunched, size S
 Z13CU31X0 Steam container, punched, size S
 Z13CU40X0 Steam container, unpunched, size L
 Z13CU41X0 Steam container, punched, size L
 Z13CV06S0 Decor strip
 Z1664X0 Combination grid
 Z1665X0 porcelain tray-GN1/3-unpunched
 Z1685X0 porcelain tray-GN2/3-unpunched
 Z18D45X0 Cookbook
 Z6390X0

Included accessories

1 x steam container punched size L
 1 x steam container unpunched size L
 1 x sponge

EAN code

4242004182122

Compact steamer Technical Data