


**iQ300**  
**LI67SA530A**  
**60 cm Slideout Rangehood**  
**Metallic silver**

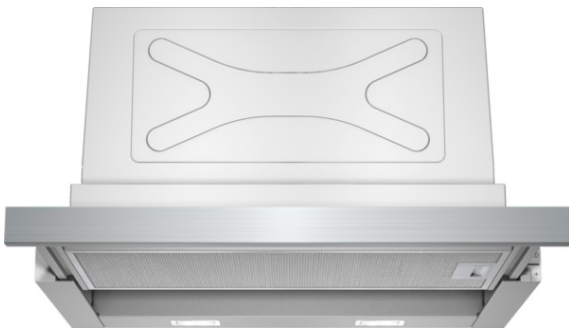

The powerful slideout rangehood practically disappears into the upper cabinet.

- ✓ The energy saving LED lighting with dimmer function ensures ambient lighting and optimal visibility when cooking.
- ✓ The highly efficient 740 m<sup>3</sup>/h extraction rate provides ideal air quality in the kitchen.
- ✓ The intensive setting temporarily increases the extraction rate when kitchen vapour is especially intense, with automatic revert to previous setting after 6 min.
- ✓ 50 dB (330 m<sup>3</sup>/h) - 150mm ducted.

#### Features

##### Technical Data

Typology : Pull-out  
 Approval certificates : CE, VDE  
 Length electrical supply cord (cm) : 175  
 Required niche size for installation (HxWxD) : 385mm x 524mm x 290mm  
 Minimum distance above an electric hob : 430  
 Minimum distance above a gas hob : 650  
 Net weight (kg) : 11.0  
 Type of control : Electronic  
 Number of speed settings : 3  
 Maximum output air extraction (m<sup>3</sup>/h) : 400  
 Boost position output recirculating (m<sup>3</sup>/h) : 490  
 Maximum output recirculating air (m<sup>3</sup>/h) : 300  
 Boost position air extraction (m<sup>3</sup>/h) : 740  
 Number of lights : 2  
 Noise level (dB) : 55  
 Diameter of air outlet (mm) : 120 / 150  
 Grease filter material : Washable aluminium  
 EAN code : 4242003769744  
 Connection Rating (W) : 146  
 Current (A) : 10  
 Voltage (V) : 220-240  
 Frequency (Hz) : 50-60  
 Plug type : AU plug  
 Installation typology : Half-integrated



4 242003 769744

#### Optional accessories

LZ46810 CleanAir active carbon filter  
 LZ46800 CleanAir Recirculation Kit

**iQ300**  
**LI67SA530A**  
**60 cm Slideout Rangehood**  
**Metallic silver**

#### Features

##### Design & Innovation

- Telescopic comfort installation
- Stainless steel profile handle included
- 2 x 3 Watt LED Lights

##### Comfort & Convenience

- For installation into a 60 cm cupboard
- 3 power levels plus intensive setting
- low-lift push buttons (3 power levels plus intensive setting) with Electronic display

##### Power and Mode of Operation

- Extraction rate according to EN 61591 ø 15 cm:  
max. Normal use 400 m<sup>3</sup>/h  
Intensive 740 m<sup>3</sup>/h
- Suitable for ducted and re-circulating operation
- Accessories required for recirculation mode: CleanAir Module
- 2 single inlet vertical fans, Efficient BLDC technology
- Intensive operation automatic revert - 6min
- Automatic run on - 10 min

##### Cleaning

- Dishwasher safe metal grease filters
- Cassette with alu frame

##### Safety and Quality

- Noise level according to EN 60704-3 und EN 60704-2-13 exhaust air:  
Max. normal use: 55 dB(A) re 1 pW (41 dB(A) re 20 µPa sound pressure)  
Intensive: 68 dB(A) re 1 pW (54 dB(A) re 20 µPa sound pressure)
- 5 year warranty

##### Dimensions (HxWxD)

- Power rating: 146 W
- Appliance dimensions (HxWxD): 426 x 598 x 290 mm
- Built-in dimensions (HxWxD): 385 x 524 x 290 mm
- Diameter pipe Ø 150 mm (Ø 120 mm enclosed)



iQ300  
LI67SA530A  
60 cm Slideout Rangehood  
Metallic silver

Dimensioned drawings

