


iQ700
EX975LVC1E
90 cm Induction cooktop

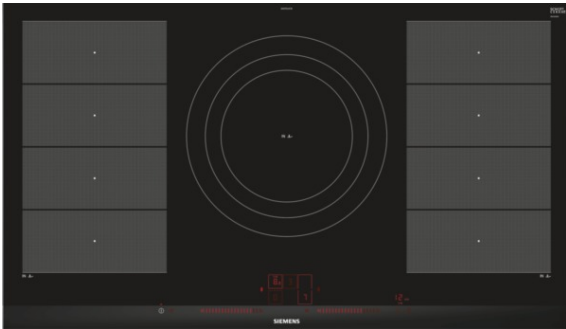

The modern flexInduction cooktop - for greater flexibility when cooking.

Induction cooktop with innovative features that enable highly flexible cooking in any situation.

- ✓ dual lightSlider: lets you easily and intuitively operate the cooktop.
- ✓ powerMove Plus: enables intuitive control thanks to three heating zones with different temperatures – activated by touch.
- ✓ fryingSensor: maintains the desired pan temperature automatically after heating up to avoid scorching.

Features

Technical Data

Product name/family : Cooking zone ceramic
 Construction type : Built-in
 Energy input : Electric
 Total number of positions that can be used at the same time : 5
 Type of control setting devices : Slider Timer
 Required niche size for installation (HxWxD) : 51 x 880-880 x 490-500
 Width of the product (mm) : 912
 Dimensions of the product (mm) : 51 x 912 x 520
 Net weight (kg) : 22.0
 Gross weight (kg) : 23.0
 Residual heat indicator : Separate
 Location of control panel : Hob front
 Basic surface material : Ceramic
 Color of surface : Black, Stainless steel
 Color of frame : Stainless steel
 Approval certificates : AENOR, CE
 Length electrical supply cord (cm) : 110
 EAN code : 4242003705599
 Electrical connection rating (W) : 11100
 Voltage (V) : 220-240
 Frequency (Hz) : 50; 60



Optional accessories

HZ390522 : Griddle Plate , HZ390512 : Teppan Yaki (large) ,
 HZ390511 : Teppan Yaki (small) , HZ390250 : System pan diameter
 28cm , HZ390042 : set of 3 pots + 1 pan for induction hob ,
 HZ390012 : Steaming rack for Induction roaster

iQ700

EX975LVC1E

90 cm Induction cooktop

Features

Cooktop Type and Special Features

- 5 induction cooking zones
- Ring zone triple, FlexZone
- Cooking zone with special 5.5kW powerBoost
- powerBoost function for all cooking zones
- panBoost
- Cooking zone centre: Triple circuit zone
 - 210 mm, 260 mm, 320 mm
 - 2.2 KW, 3.3 KW, 2.6 KW / 4.6 KW with PowerBoost
- fryingSensor Plus with 5 temperature settings

Design & Innovation

- Black ceramic glass with stainless steel side profiles and beveled front
- New design (of printing)
- Can be combined with Domino cooktops

Comfort & Convenience

- Dual LightSlider
- LED display and timer with auto switch off for all cooking zones
- Count up timer per cooktop
- ReStart - Quickly reinstates previous settings
- QuickStart - Quick and automatic first pot detection
- powerMove Plus

Size & Power

- 17 power levels for each cooking zone
- Cooking zones:
 - 1 x Ø 400 mmx230 mm, 3.3 KW (max. Power level 3.7 KW) Induction or 2 x Ø 200 mm, 2.2 KW (max. Power level 3.7 KW) Induction;
 - 1 x Ø 320 mm, 2.2 KW (max. Power level 3.7 KW) Induction;
 - 1 x Ø 400 mmx230 mm, 3.3 KW (max. Power level 3.7 KW) Induction oder 2 x Ø 200 mm, 2.2 KW (max. Power level 3.7 KW) Induction
- 11.1 kW total connected load

Safety and Environment

- Automatic pan recognition
- Automatic safety switch-off childproof lock
- 2-stage (h/H) digital residual heat indicator
- Energy efficiency display

Dimensions (WxD)

- Installation measurements: 880 mmx490 mm
- Length wire connection: 110 cm
- Min. worktop thickness: 30 mm

iQ700
EX975LVC1E
90 cm Induction cooktop

Dimensioned drawings

