

**Serie | 6 Hoods**
**DHL785BAU**  
**70 cm Integrated Rangehood**

**D**

**The integrated rangehood: offers a sleek and seamless design in the kitchen with fully integrated installation.**

- **Extraction rate:** at 730 m<sup>3</sup>/h, it quickly ensures optimal kitchen air quality.
- Halogen lighting provides optimal, energy-efficient illumination of the cooktop.
- **Intensive speed setting with reset:** automatically resets the hood to regular speed setting after 6 min.
- **Especially quiet:** just 63 dB (540 m<sup>3</sup>/h) - 150 mm ducted.

**Technical Data**

Typology :	Traditional
Approval certificates :	CE, VDE
Length electrical supply cord (cm) :	150
Required niche size for installation (HxWxD) :	418mm x 676mm x 264mm
Minimum distance above an electric hob :	500
Minimum distance above a gas hob :	650
Net weight (kg) :	10.0
Type of control :	Electronic
Number of speed settings :	3
Maximum output air extraction (m <sup>3</sup> /h) :	630
Boost position output recirculating (m <sup>3</sup> /h) :	310
Maximum output recirculating air (m <sup>3</sup> /h) :	300
Boost position air extraction (m <sup>3</sup> /h) :	730
Number of lights :	2
Noise level (dB) :	66
Diameter of air outlet (mm) :	150 / 120
Grease filter material :	Washable synthetic
Connection Rating (W) :	315
Current (A) :	3
Voltage (V) :	220-240
Frequency (Hz) :	50
Plug type :	AU plug
Installation typology :	Half-integrated


**Optional accessories**

DHZ5605 : Recirculating kit

## Serie | 6 Hoods

### DHL785BAU

#### 70 cm Integrated Rangehood

**The integrated rangehood: offers a sleek and seamless design in the kitchen with fully integrated installation.**

---

##### **Design & Innovation**

- Fully integrated rangehood
- Stainless steel
- Rim ventilation
- 

##### **Power and Mode of Operation**

- 3 power settings plus intensive setting
- 730 m<sup>3</sup>/h max. extraction rate
- Ducted and recirculated-air operation
- Powerful single motor with twin fan

##### **Comfort & Convenience**


- Intensive operation automatic revert - 6min
- 63 dB (540 m<sup>3</sup>/h) - 150 mm ducted
- Electronic controls with low-lift push buttons
- 2 x 20W halogen lights
- Dual filter system with outer aluminium frame and inner metal grease filter
- Dishwasher safe metal grease filters
- Accessories required for recirculation mode: Charcoal filter

##### **Dimensions (HxWxD)**


- Appliance (WxD): 700 mm x 282 mm
- Appliance - Ducted (HxWxD): 418min - 418max x 676 x 264 mm
- Appliance - Re-circulated (HxWxD): 418min - 418max x 676 x 264 mm
- Diameter pipe Ø 150 mm (Ø 120 mm enclosed)

**Serie | 6 Hoods**


**DHL785BAU**  
**70 cm Integrated Rangehood**

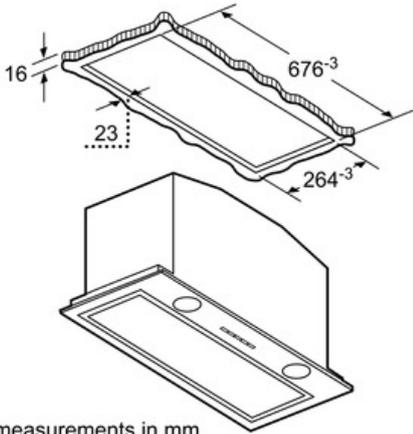

measurements in mm



measurements in mm

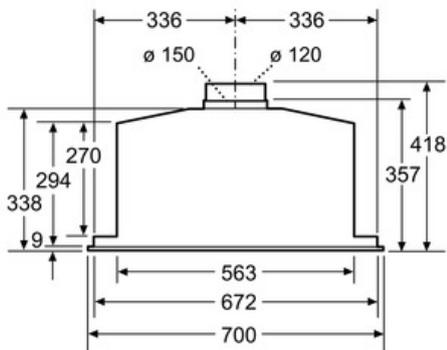

measurements in mm