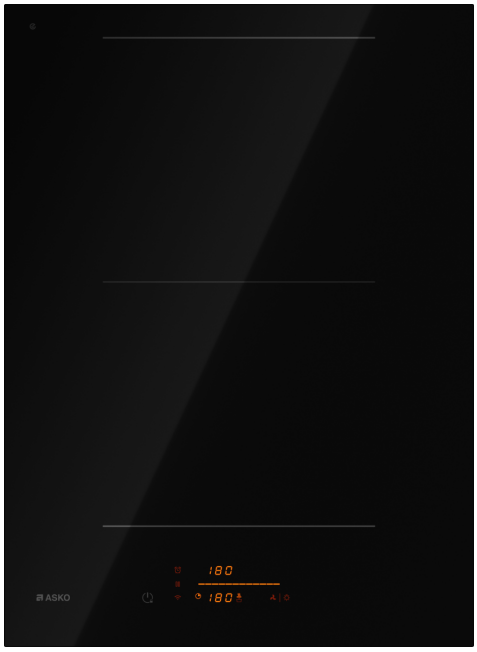

Induction hob

HI5320FBG1

Series 5
Cooktop material: Glass Ceramic
Flexible Bridge Induction™ Technology
Installation: Built-in
Black

Construction and performance
- Cooktop material: Glass Ceramic
- Frame design: Without frame
- Number of cooking zones: 2
- PowerBoost function: Yes
- Cooking zone front: Induction octa heater
- Ø front (mm): 190X220
- Cooking zone power front: 2200 W
- 2. cooking zone power front: 3600 W
- Cooking zone behind: Induction octa heater
- Cooking zone power behind: 2200 W
- 2. cooking zone power behind: 3600 W

Use and flexibility
- Bridge function: Flexible Bridge Induction™ Technology
- Functions: Frying, Auto heat, Bridge Induction, Grill, Boiling, Simmering, Move, Autobridge
- Pot detection: Yes, first pot only
- Multi-timer: Yes
- Pause function: Yes
- Wifi: Yes
- ConnectLife: Monitoring and control in the palm of your hand: ConnectLife

Interaction and control
- Control panel: SliderTouch, control at your fingertips

Design and integration
- Edges: Soft cut edges
- Min. niche width: 350 mm
- Width of niche size for installation max.: 352 mm
- Min. niche height: 68 mm
- Depth (incl. wall spacing): 490 mm
- Type of hob installation: Top & flush built-in installation

Safety and maintenance
- Residual heat indicator: Yes

Technical data
- Voltage (V): 220-240 V
- Frequency: 50 Hz, 60 Hz
- Time needed for the appliance to reach the applicable low power mode or condition: 1 min
- Power consumption in networked standby mode of hob (WiFi enabled): 0.701 W
- Power consumption in standby mode of hob: 0.3 W

Dimensions
- Height: 52 mm
- Width: 380 mm
- Depth: 520 mm
- Length of electrical cord: 1500 mm
- Net weight: 5.601 kg

Logistic information

- Packaging height: 135 mm
- Packaging width: 654 mm
- Packaging depth: 524 mm
- Gross weight: 6.9 kg
- Product code: 745336
- EAN code: 3838782924927

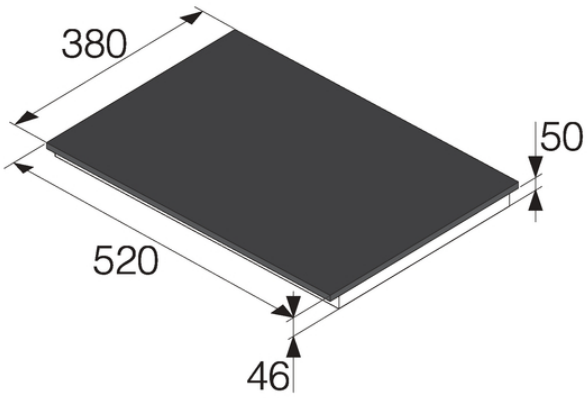

Top built

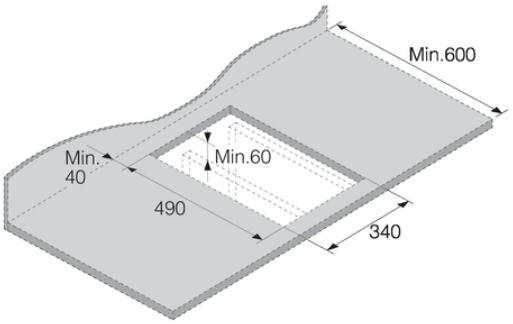

Flush built

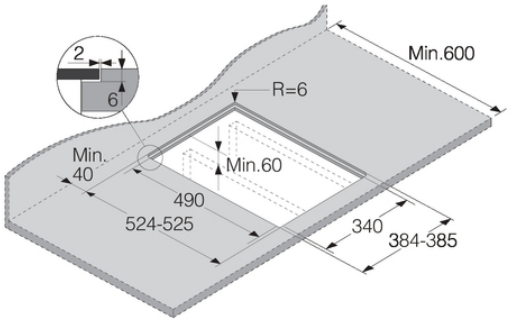

Installation drawing 5 Series HI53XXX