

## PUR 98 W

Wall mounted cooker hood with energy-efficient LED lighting and light-touch switches for easy use.



- Timeless design – 898mm wide stainless steel rangehood
- Powerful – 790m<sup>3</sup>/h on the booster setting
- Efficient filtration – 10-layer stainless-steel grease filter
- Safe and easy to clean – Miele CleanCover
- Suitable for every home – for extraction or recirculation

<b>Construction type</b>	
Wall-mounted rangehood	•
<b>Design</b>	
Colour	Stainless steel
RAL colours available as customisation on request	•
Customisation possible on request	•
Variable height available as customisation on request	•
Variable width available as customisation on request	•
<b>Operating modes</b>	
Type of air guide	Convertible
<b>User convenience</b>	
Electronic controls	•
Light-touch switches with LED	•
Power levels (number without Booster level)	3
Booster level	•
Programmable Booster level switch-off	•
<b>Cleaning convenience</b>	
Easy-to-clean canopy interior – CleanCover	•
<b>Filter system</b>	
Number of dishwasher safe stainless-steel grease filters (10-ply)	3
<b>Lighting</b>	
LED	•
Light intensity in Lx	450
Colour temperature in K	3,000
<b>Fan</b>	
Dual-action fan	•
AC motor	•
<b>Air throughput with max. duct diameter in extraction mode (not for external version)</b>	
Air throughput in Level 1 (m <sup>3</sup> /h) according to EN 61591	290
Air throughput in Level 2 (m <sup>3</sup> /h) according to EN 61591	420
Air throughput in Level 3 (m <sup>3</sup> /h) according to EN 61591	570
Air throughput in Booster level (m <sup>3</sup> /h) according to EN 61591	790
Sound power in Level 1 (dB(A) re 1 pW) according to EN 60704-3	47
Sound power in Level 2 (dB(A) re 1 pW) according to EN 60704-3	54
Sound power in Level 3 (dB(A) re 1 pW) according to EN 60704-3	62
Sound power in Booster level (dB(A) re 1 pW) acc. to EN 60704-3	68
Sound pressure in Level 1 (dB(A) re 20 µPa) according to EN 60704-2-13	34
Sound pressure in Level 2 (dB(A) re 20 µPa) according to EN 60704-2-13	41
Sound pressure in Level 3 (dB(A) re 20 µPa) according to EN 60704-2-13	49
Sound power in Booster level (dB(A) re 20 µPa) acc. to EN 60704-2-13	55

## PUR 98 W


Wall mounted cooker hood with energy-efficient LED lighting and light-touch switches for easy use.



<b>Air throughput in recirculation mode</b>	
Air throughput in Level 1 (m <sup>3</sup> /h) according to EN 61591	220
Air throughput in Level 2 (m <sup>3</sup> /h) according to EN 61591	320
Air throughput in Level 3 (m <sup>3</sup> /h) according to EN 61591	420
Air throughput in Booster level (m <sup>3</sup> /h) according to EN 61591	470
Sound power in Level 1 (dB(A) re 1 pW) according to EN 60704-3	60
Sound power in Level 2 (dB(A) re 1 pW) according to EN 60704-3	66
Sound power in Level 3 (dB(A) re 1 pW) according to EN 60704-3	71
Sound power in Booster level (dB(A) re 1 pW) acc. to EN 60704-3	74
Sound pressure in Level 1 (dB(A) re 20 µPa) according to EN 60704-2-13	47
Sound pressure in Level 2 (dB(A) re 20 µPa) according to EN 60704-2-13	53
Sound pressure in Level 3 (dB(A) re 20 µPa) according to EN 60704-2-13	58
Sound power in Booster level (dB(A) re 20 µPa) acc. to EN 60704-2-13	61
<b>Safety</b>	
Safety switch-off	•
<b>Technical data</b>	
Overall height for extraction mode and external mode cooker hoods in mm	685
Overall height for recirculation mode cooker hoods in mm	815
Canopy width in mm	898
Canopy height in mm	62
Canopy depth in mm	500
Net weight in kg	25.0
Length of supply lead in m	1.5
Standard plug fitted	•
Total rated load in kW	0.30
Voltage in V	230
Fuse rating in A	10
Number of phases	1
<b>Installation notes</b>	
Extraction ducting connection at top	•
Extraction connection at top and rear	•
Diameter of extraction ducting connection in mm	150
Telescopic chimney	•
<b>Standard accessories</b>	
Non-return flap	•

## PUR 98 W

Wall mounted cooker hood  
with energy-efficient LED lighting and light-touch switches for easy use.

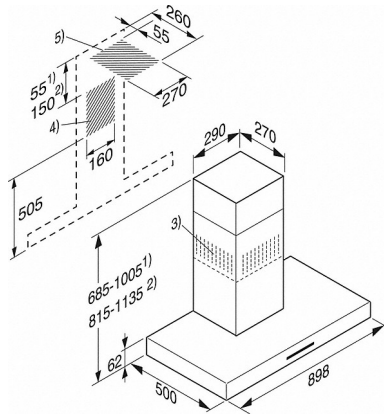

DA 419-6, DA 419-7 (Installation drawing)

- 1) Extraction
- 2) Recirculation
- 3) Ventilation grille at top for recirculation
- 4+5) Installation cut-out (5 not required for recirculation)