



AC200191
Integrated rangehood 200 series
Width 86 cm
Air extraction / Air recirculation

Can be integrated invisibly in upper cabinet
Energy-saving, low-noise fan
Rim extraction with flat and easy-to-clean glass underside
Dimmable, neutral white LED light for ideal illumination of the whole cooktop
Air extraction or air recirculation system
Energy efficiency class A++ at a range of energy efficiency classes from A++ to E.

Color Variants

AC200191
Width 86 cm
Air extraction / Air recirculation

Optional accessories

AA200510
Remote control for canopy extractor AC200
AA210110
1 activated charcoal filter with high efficient odour reduction due to increased surface. For air recirculation module AA 211 812.
AA211812
Patented air recirculation module including 1 activated charcoal filter with high efficient odour reduction due to increased surface

Output

3 electronically controlled power levels and 1 intensive mode.
Air extraction:
610 / 800 m³/h.
64 / 70 dB (A) re 1 pW.
51 / 57 dB (A) re 20 µPa.
Air recirculation:
540 / 790 m³/h.
72 / 77 dB (A) re 1 pW.
59 / 65 dB (A) re 20 µPa.
Odour reduction air recirculation 94 %.

Features

Stainless steel and glass
Remote control is available as a special accessory.
Interval ventilation, 6 min.
Run-on function, 6 min.
Grease filter saturation indicator.
Metal grease filter, dishwasher-safe.
Glass filter cover.
Neutral white LED light (4000 K), dimmable.
Lamp output 2 x 1 W.
Illuminance 266 lx.
Fan technology with highly efficient, brushless DC motor (BLDC).

Consumption data

Energy consumption 31.4 kwh/year.
Sound level min. 41 dB / max. 64 dB normal mode.

Planning notes

Patented air recirculation module with activated charcoal filter can be installed in the upper cabinet. The activated carbon filter can be changed from the front by simply pulling out the filter drawer.
The door of the upper cabinet must be fully open in order to change the activated charcoal filter.
Can be integrated invisibly in upper cabinet.
Vario cooktops with intensive production of vapours like VR/VP should be placed in the middle beneath the hood (in this case air recirculation is not recommended).
Minimum clearance between gas cooktop(s) with more than 39.6 MJ/h and ventilation hood 70cm. For more details, please refer to gas cooktop(s) installation manual(s).
Clearance above electric appliances min. 50 cm.
When installing a ventilation hood with air extraction mode and a chimney-vented fireplace, the power supply line of the ventilation appliance needs a suitable safety switch.

Connection

Total connected load 172 W.
Connecting cable 1.0 m with plug.

Characteristics


Product name/family
Color chimney
Typology
Traditional
Approval certificates
CE, Eurasian, G-Mark, Ukraine, VDE
Length electrical supply cord (cm)
100
Required niche size for installation (HxWxD)
418mm x 836mm x 264mm
Height of the chimney (mm)
Height of product, without chimney (mm)
Minimum distance above an electric hob
500
Minimum distance above a gas hob
650
Net weight (kg)
9.788
Type of control
Electronic
Number of speed settings
Maximum output air extraction (m³/h)
610
Boost position output recirculating (m³/h)
790
Maximum output recirculating air (m³/h)
540
Boost position air extraction (m³/h)
800
Number of lights
2
Noise level (dB)
64
Diameter of air outlet (mm)
120 / 150
Grease filter material
Washable aluminium
EAN code
4242006284787

Consumption and connection features

Connection Rating (W)
172
Current (A)
3
Voltage (V)
220-240
Frequency (Hz)
50
Plug type
Gardy plug w/ earthing

Installation typology
Built-in

2019-07-22
Page 1

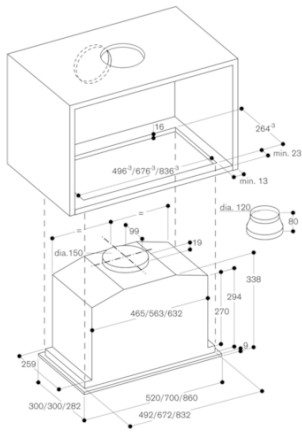

View of upper cabinet from above with AC 200 and AA 211 812

