



Color Variants

VG232220AU
Black anodized control panel in
aluminium
Width 28 cm

Optional accessories

VD200020
Black appliance cover anodized
aluminium

Installation Accessories

VV200010
Stainless steel connection strip
for combination with other Vario
appliances of the 200 series
VV200020
Black connection strip for combination
with other Vario appliances of the 200
series

VG232220AU
Vario gas cooktop 200 series
Black anodized control panel in
aluminium
Width 28 cm

Can be combined with the cooktops
of the Vario 200 series to a harmonic
unity
Control panel for comfortable and
secure operation
Mechanical power level regulation for
9 power levels, with exact setting and
reproduction of flame size
Solid smooth-surface cast pan
supports for easy and safe
positioning of cookware

Cooking zones

1 high output burner with 10.8 MJ/h,
suitable for pots up to max. ø 22 cm.
1 standard burner with 6.8 MJ/h,
suitable for pots up to max. ø 20 cm.

Handling

Control knobs with illuminated ring.
Integrated control panel.
One-handed operation.
Electric ignition.

Features

Cast pan support with continuous pot
surface.
Enamelled burner cover.

Safety

Thermoelectric safety pilot.
Residual heat indication.
Operation indicator.

Planning notes



Appliance can be snapped into the
worktop from above.
A minimum clearance of at least 150
mm from adjacent heat-sensitive
furniture or contact surfaces must be
observed or thermal insulation fitted.
With a total connected load of more
than 39.6 MJ/h local regulations
concerning room ventilation, room
size and combination of extraction or
recirculation hoods must be observed.
Minimum clearance between gas
cooktop(s) with more than 39.6 MJ/h
(11kW) and ventilation hood 70 cm.
Appliance weight: approx. 8 kg.

Connection

Total connected load gas 17.6 MJ/h
Total connected load electric 10.0 W.
Connecting cable 1.7 m with plug.
Natural gas 10 mbar
Nozzles for liquid gas included

Characteristics
Product name/family
Vario/Domino gas hob w control
Built-in / Free-standing
CONSTR_TYPE.Built-in
Energy input
Gas
Total number of positions that can be used at the same time
2
Required niche size for installation (HxWxD)
106 x 268 x 492
Width of the product (mm)
288
Dimensions of the product (mm)
106 x 288 x 512
Dimensions of the packed product (HxWxD) (mm)
260 x 400 x 600
Net weight (kg)
8.029
Gross weight (kg)
9.0
Residual heat indicator
Separate
Location of control panel
Hob front
Basic surface material
brushed stainless steel
Color of surface
Stainless steel
Color of frame
Stainless steel
Approval certificates
Australia Standards, Australia Standards
Length electrical supply cord (cm)
170
EAN code
4242006280055

Consumption and connection features
Electrical connection rating (W)
10
Gas connection rating (W)
4900
Current (A)
10
Voltage (V)
220-240
Frequency (Hz)
50; 60
2019-07-19
Page 1

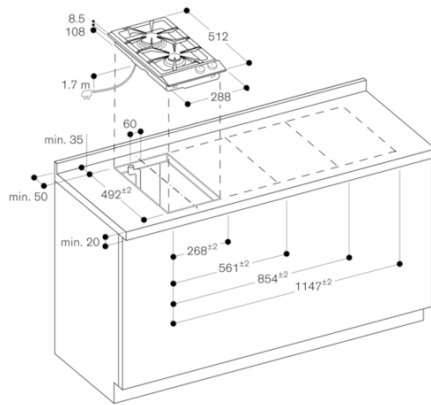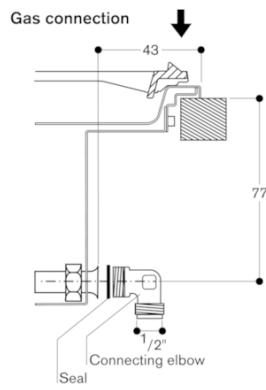

Minimum distance from the appliance cut-out to the side wall 150 mm.