



Color Variants

VG415211AU
Width 38 cm

Included accessories

1 x WOK attachment ring.

Optional accessories

WP400001
Wok pan made of multiple-layer material

Installation Accessories

VA420000
Connection strip for combination with other Vario appliances of the 400 series for flush mounting
VA420001
Connection strip for combination with other Vario appliances of the 400 series for flush mounting with appliance cover/filler strip
VA420010
Connection strip for combination with other Vario appliances of the 400 series for surface mounting
VA420011
Connection strip for combination with other Vario appliances of the 400 series for surface mounting with appliance cover/filler strip
VA440010
Stainless steel appliance cover with mounting strip
VA450400
Stainless steel filler strip 38 cm

VG415211AU
Vario gas wok 400 series
Width 38 cm

Can be combined perfectly with other Vario appliances of the 400 series
Full electronic power level regulation on 12 levels
Precise and reproducible flame size
Automatic fast ignition, electronic flame monitoring with automatic re-ignition
Simmer function for cooking on a very low output level
Solid stainless steel control knob
Precision crafting of 3 mm stainless steel
For surface mounting with a visible edge or for flush mounting

Cooking zones

1 multi-ring wok burner with 18 MJ/h, suitable for pots up to max. ø 32 cm.

Handling

1 flexible installation control knob (1m connecting cable)
Control knobs with illuminated ring, cooking zone and output level markings.
One-handed operation.
Full electronic control in 12 output levels for exact power level regulation plus simmer function.
Automatic fast ignition.

Features

Stainless steel
Simmer function.
Cast iron pan support with flat, continuous pot surface.
Brass burner ring(s).

Safety

Electronic flame monitoring with automatic re-ignition.
Residual heat indicator.
Safety shut-off.

Planning notes

Depending on the type of installation (surface-mounted or flush-mounted, with or without an appliance cover), the specific location of the cut-out and the knob positions may vary.
Appliance can be snapped into the worktop from above.
The drawing "Installation of the control knob" must be observed if the panel is more than 23 mm thick (there must be a recess at the rear).
If installing with the appliance cover VA 440 or filler strip VA 450 take into account the additional space required for the depth.
If combining several appliances with at least one appliance cover, the filler strip VA 450 is required to compensate for the depth of the appliance without the appliance cover.
If combining several Vario appliances of the 400 series, a connection strip VA 420 must be placed between the appliances. Depending on the type of installation, the corresponding connection strip must be provided.
In the cut-out, the installation system requires the side edge to be at least 10 mm for surface mounting and at least 13 mm for flush mounting. Ensure a continuous cut surface of 90°.
The bearing capacity and stability, in the case of thin worktops in particular, must be supported using suitable substructures. Take into account the appliance weight and additional loads.

Characteristics

Product name/family
Vario/Domino gas hob
Built-in / Free-standing
CONSTR_TYPE.Built-in
Energy input
Gas
Total number of positions that can be used at the same time
1
Required niche size for installation (HxWxD)
131 x 360 x 492
Width of the product (mm)
380
Dimensions of the product (mm)
131 x 380 x 520
Dimensions of the packed product (HxWxD) (mm)
300 x 500 x 600
Net weight (kg)
14.754
Gross weight (kg)
17.0
Residual heat indicator
Separate
Location of control panel
External control
Basic surface material
brushed stainless steel
Color of surface
Stainless steel, Stainless steel
Color of frame
Stainless steel, Stainless steel
Approval certificates
Australia Standards, Australia Standards
Length electrical supply cord (cm)
140
EAN code
4242006262884

Consumption and connection features

Electrical connection rating (W)
15
Gas connection rating (W)
5000
Current (A)
2
Voltage (V)
220-240
Frequency (Hz)
50; 60


2019-07-26
Page 1

Additional instructions for flush mounting:
Installation is possible in worktops made of stone, synthetics or solid wood. Heat resistance and watertight sealing of the cut edges must be observed. Concerning other materials please consult the worktop manufacturer.
The groove must be continuous and even, so that uniform placing of the appliance on the gasket is ensured. Do not use discontinuous lining.
The joint width may vary due to size tolerances of the combinations and of the worktop cut-out.
If installing several appliances in individual cut-outs allow for a division bar of minimum 50 mm between the individual cut-outs.
Special nozzles can be ordered as spare parts.
Plan for an electrical connection (the appliance is not operable without power supply).
Air intake from above.
No intermediate shelf required.
Rear panel and wall trims must be heat-resistant and consist of a non-flammable material.
A minimum clearance of at least 150 mm from adjacent heat-sensitive furniture or contact surfaces must be observed or thermal insulation fitted.
If operated next to the downdraft ventilation VL 414, the air baffle AA 414 is recommended to ensure maximum performance of the cooktop.
With a total connected load of more than 39.6 MJ/h local regulations concerning room ventilation, room size and combination of extraction or recirculation hoods must be observed.
Minimum clearance between gas cooktop(s) with more than 39.6 MJ/h (11kW) and ventilation hood 70 cm.
Appliance weight: approx. 15 kg.


Connection

Total connected load gas 18.0 MJ/h
Total connected load electric 15.0 W.
Connecting cable 1.4 m with plug.
Natural gas 10 mbar


Installation with appliance cover/spacer batten;
installation standing proud of surrounding surfaces

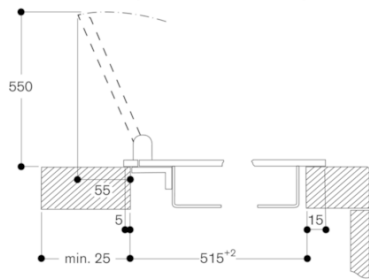

Installation with appliance cover/spacer batten;
installation flush with surrounding surfaces

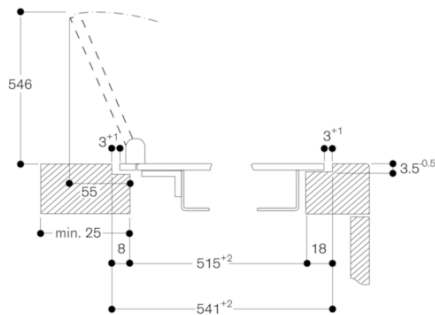


View from above




* with appliance cover or filler strip
(observe the front and rear asymmetrical support,
see separate notes "Installation with appliance
cover/filler strip").

Cross-section

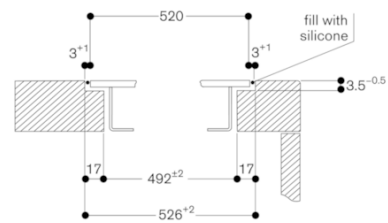


When installing with appliance cover or filler strip, pay attention
to the deeper cut-out and the front and rear groove width.




Longitudinal section

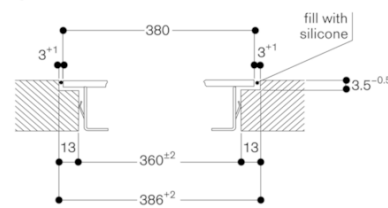

Installation of the control knob; flush installation

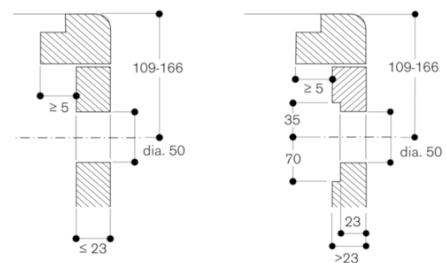

measurements in mm

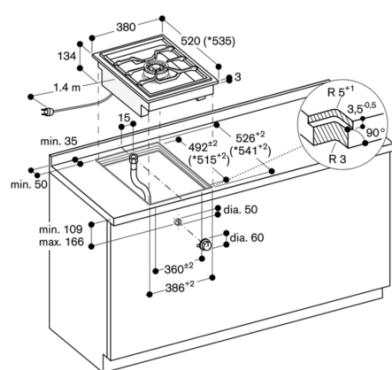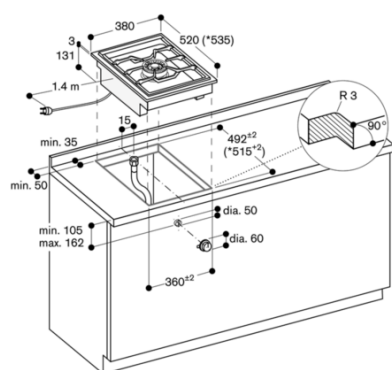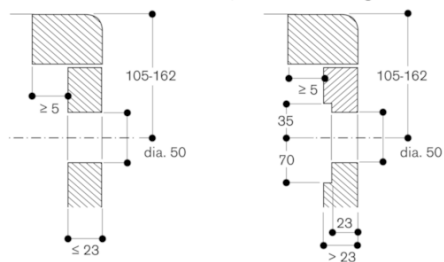

* with appliance cover or filler strip
See separate planning notes.