



#### Color Variants

VG425211AU

Width 38 cm

#### Installation Accessories

VA420000

Connection strip for combination with other Vario appliances of the 400 series for flush mounting

VA420001

Connection strip for combination with other Vario appliances of the 400 series for flush mounting with appliance cover/filler strip

VA420010

Connection strip for combination with other Vario appliances of the 400 series for surface mounting

VA420011

Connection strip for combination with other Vario appliances of the 400 series for surface mounting with appliance cover/filler strip

VA440010

Stainless steel appliance cover with mounting strip

VA450400

Stainless steel filler strip 38 cm

VG425211AU

Vario gas cooktop 400 series

Width 38 cm

Can be combined perfectly with other Vario appliances of the 400 series  
Full electronic power level regulation on 12 levels  
Precise and reproducible flame size  
Automatic fast ignition, electronic flame monitoring with automatic re-ignition  
Simmer function for cooking on a very low output level  
Solid stainless steel control knob  
Precision crafting of 3 mm stainless steel  
For surface mounting with a visible edge or for flush mounting

#### Cooking zones

1 two-ring high output burner with 14.0 MJ/h, suitable for pots up to max. ø 28 cm.

1 two-ring standard output burner with 6.5 MJ/h, suitable for pots up to max. ø 24 cm.

#### Handling

2 flexible installation control knobs (1m connecting cable)  
Control knobs with illuminated ring, cooking zone and output level markings.  
One-handed operation.  
Full electronic control in 12 output levels for exact power level regulation plus simmer function.  
Automatic fast ignition.

#### Features

Stainless steel  
Simmer function.  
Cast iron pan support with flat, continuous pot surface.  
Brass burner ring(s).

#### Safety

Electronic flame monitoring with automatic re-ignition.  
Residual heat indicator.  
Safety shut-off.

#### Planning notes

Depending on the type of installation (surface-mounted or flush-mounted, with or without an appliance cover), the specific location of the cut-out and the knob positions may vary.  
Appliance can be snapped into the worktop from above.  
The drawing "Installation of the control knob" must be observed if the panel is more than 23 mm thick (there must be a recess at the rear).  
If installing with the appliance cover VA 440 or filler strip VA 450 take into account the additional space required for the depth.  
If combining several appliances with at least one appliance cover, the filler strip VA 450 is required to compensate for the depth of the appliance without the appliance cover.  
If combining several Vario appliances of the 400 series, a connection strip VA 420 must be placed between the appliances. Depending on the type of installation, the corresponding connection strip must be provided.  
In the cut-out, the installation system requires the side edge to be at least 10 mm for surface mounting and at least 13 mm for flush mounting. Ensure a continuous cut surface of 90°.

#### Characteristics

Product name/family

Vario/Domino gas hob

Built-in / Free-standing

CONSTR\_TYPE.Built-in

Energy input

Gas

Total number of positions that can be used at the same time

2

Required niche size for installation (HxWxD)

131 x 360 x 492

Width of the product (mm)

380

Dimensions of the product (mm)

131 x 380 x 520

Dimensions of the packed product (HxWxD) (mm)

300 x 500 x 600

Net weight (kg)

13.368

Gross weight (kg)

15.0

Residual heat indicator

Separate

Location of control panel

External control

Basic surface material

brushed stainless steel

Color of surface

Stainless steel, Stainless steel

Color of frame

Stainless steel, Stainless steel

Approval certificates

Australia Standards, Australia Standards

Length electrical supply cord (cm)

140

EAN code

4242006262921

#### Consumption and connection features

Electrical connection rating (W)

15

Gas connection rating (W)

5700

Current (A)

2

Voltage (V)

220-240

Frequency (Hz)

50; 60

2019-07-26

Page 1

The bearing capacity and stability, in the case of thin worktops in particular, must be supported using suitable substructures. Take into account the appliance weight and additional loads. Additional instructions for flush mounting:

Installation is possible in worktops made of stone, synthetics or solid wood. Heat resistance and watertight sealing of the cut edges must be observed. Concerning other materials please consult the worktop manufacturer.

The groove must be continuous and even, so that uniform placing of the appliance on the gasket is ensured. Do not use discontinuous lining.

The joint width may vary due to size tolerances of the combinations and of the worktop cut-out.

If installing several appliances in individual cut-outs allow for a division bar of minimum 50 mm between the individual cut-outs.

Special nozzles can be ordered as spare parts.

Plan for an electrical connection (the appliance is not operable without power supply).

Air intake from above.

No intermediate shelf required.

Rear panel and wall trims must be heat-resistant and consist of a non-flammable material.

A minimum clearance of at least 150 mm from adjacent heat-sensitive furniture or contact surfaces must be observed or thermal insulation fitted.

If operated next to the downdraft ventilation VL 414, the air baffle AA 414 is recommended to ensure maximum performance of the cooktop.

With a total connected load of more than 39.6 MJ/h local regulations concerning room ventilation, room size and combination of extraction or recirculation hoods must be observed.


Minimum clearance between gas cooktop(s) with more than 39.6 MJ/h (11kW) and ventilation hood 70 cm. Appliance weight: approx. 13 kg.

#### Connection


Total connected load gas 20.5 MJ/h  
Total connected load electric 15.0 W.  
Connecting cable 1.4 m with plug.  
Natural gas 10 mbar

GAGGENAU


Installation with appliance cover/spacer batten;  
installation standing proud of surrounding surfaces

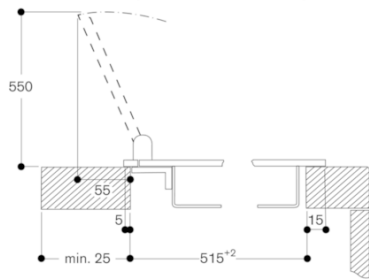

Installation with appliance cover/spacer batten;  
installation flush with surrounding surfaces

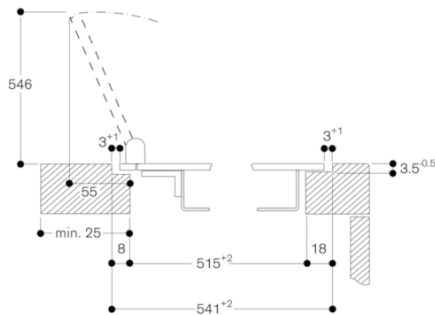


View from above




\* with appliance cover or filler strip  
(observe the front and rear asymmetrical support,  
see separate notes "Installation with appliance  
cover/filler strip").

Cross-section

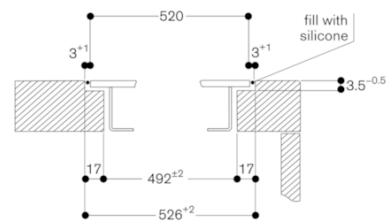


When installing with appliance cover or filler strip, pay attention  
to the deeper cut-out and the front and rear groove width.

Longitudinal section

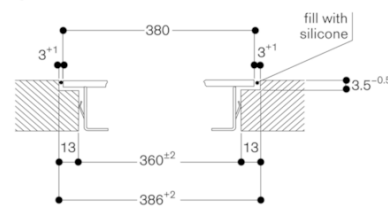


Installation of the control knob; flush installation

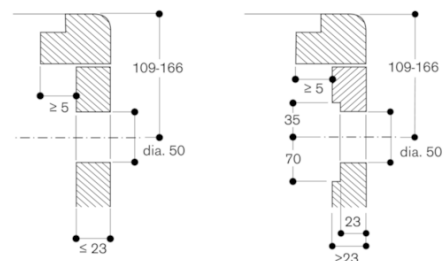


measurements in mm


Installation of the control knob; surface mounting

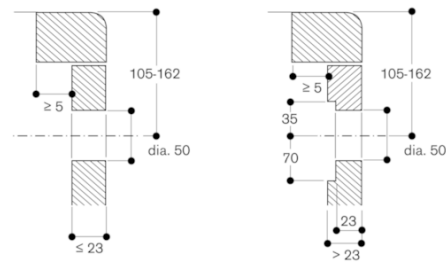

measurements in mm

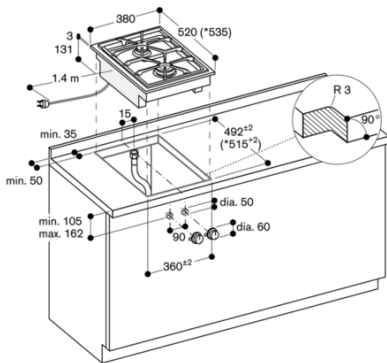

\* with appliance cover or filler strip  
For further installation options, see the installation instructions.

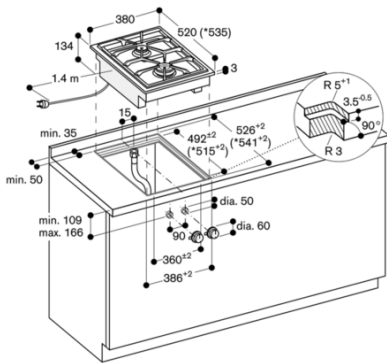

\* with appliance cover or filler strip  
For further installation options, see the installation instructions.