

DA 2698

Extractor unit

with energy-efficient LED lighting and light-touch switches for easy use.



- Customised kitchen design – fully integrated in 880mm width
- Unique user convenience – Con@ctivity
- Powerful – 890m<sup>3</sup>/h on the booster setting
- Energy-efficient and quiet – powerful ECO motor
- Elegant and efficient – edge extraction panels

Price \$ 3,599.00\*\*

\*\* GST inclusive

<b>Construction type</b>	
Integrated extractor	•
<b>Design</b>	
Colour	Stainless steel
Edge extraction	•
<b>Operating modes</b>	
Type of air guide	Convertible
Active charcoal filter (order separately)	DKF19-1
<b>User convenience</b>	
Networking with Miele@home	•
Automatic function Con@ctivity 3.0 (WiFi)	•
Electronic controls	•
Light-touch controls	•
Miele@mobile app	•
Power levels (number without Booster level)	3
Booster level	•
Programmable Booster level switch-off	•
Run-on time 5 / 15 min.	•
Grease filter saturation indicator programmable	•
Active charcoal filter saturation indicator programmable	•
<b>Cleaning convenience</b>	
Easy-to-clean canopy interior – CleanCover	•
<b>Efficiency and sustainability</b>	
ECO package	•
<b>Filter system</b>	
Number of dishwasher safe stainless steel grease filters	2
<b>Lighting</b>	
LED	•
Light intensity in Lx	650
Colour temperature in K	3,500
Dimmer function	•
<b>Fan</b>	
Dual-action fan	•
ECO motor (DC motor)	•

DA 2698

Extractor unit

with energy-efficient LED lighting and light-touch switches for easy use.



<b>Air throughput with max. duct diameter in extraction mode (not for external version)</b>	
Air throughput in Level 1 (m <sup>3</sup> /h)	315
Air throughput in Level 2 (m <sup>3</sup> /h)	475
Air throughput in Level 3 (m <sup>3</sup> /h)	640
Air throughput in Booster level (m <sup>3</sup> /h)	890
Sound power in Level 1 (dB(A) re 1 pW)	46
Sound power in Level 2 (dB(A) re 1 pW)	55
Sound power in Level 3 (dB(A) re 1 pW)	62
Sound power in Booster level (dB(A) re 1 pW)	70
Sound pressure in Level 1 (dB(A) re 20 µPa)	31
Sound pressure in Level 2 (dB(A) re 20 µPa)	41
Sound pressure in Level 3 (dB(A) re 20 µPa)	48
Sound pressure in Booster level (dB(A) re 20 µPa)	56
<b>Air throughput in recirculation mode</b>	
Air throughput in Level 1 (m <sup>3</sup> /h)	245
Air throughput in Level 2 (m <sup>3</sup> /h)	390
Air throughput in Level 3 (m <sup>3</sup> /h)	440
Air throughput in Booster level (m <sup>3</sup> /h)	600
Sound power in Level 1 (dB(A) re 1 pW)	57
Sound power in Level 2 (dB(A) re 1 pW)	66
Sound power in Level 3 (dB(A) re 1 pW)	69
Sound power in Booster level (dB(A) re 1 pW)	74
Sound pressure in Level 1 (dB(A) re 20 µPa)	43
Sound pressure in Level 2 (dB(A) re 20 µPa)	52
Sound pressure in Level 3 (dB(A) re 20 µPa)	55
Sound power in Booster level (dB(A) re 1 pW)	60
<b>Safety</b>	
Safety switch-off	•
<b>Technical data</b>	
Canopy width in mm	880
Canopy height in mm	64
Canopy depth in mm	293
Net weight in kg	14.0
Length of supply lead in m	1.5
Standard plug fitted	•
Total rated load in kW	0.24
Voltage in V	230
Fuse rating in A	10
Number of phases	1

DA 2698


Extractor unit

with energy-efficient LED lighting and light-touch switches for easy use.



<b>Installation notes</b>	
Extraction ducting connection at top	•
Extraction connection at top and rear	•
Diameter of extraction ducting connection in mm	150
Combination with WiFi-enabled Miele hob	recommended
<b>Standard accessories</b>	
Non-return flap	•
RF Con@ctivity 2.0 communication stick for KM	XKS 3000 Z


## Appliance dimensions

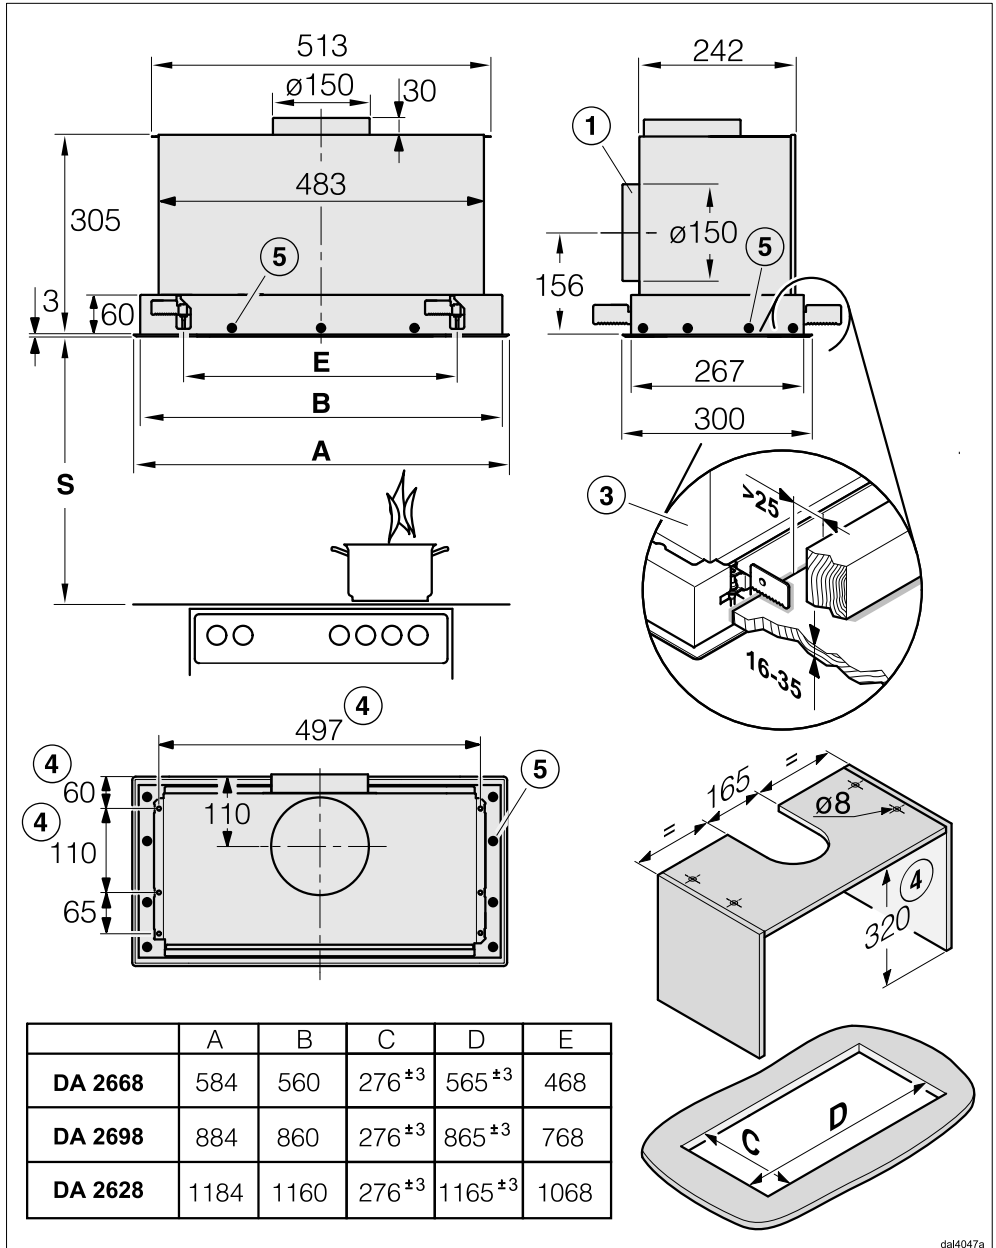

dal4047a

The drawing is not to scale

# Installation

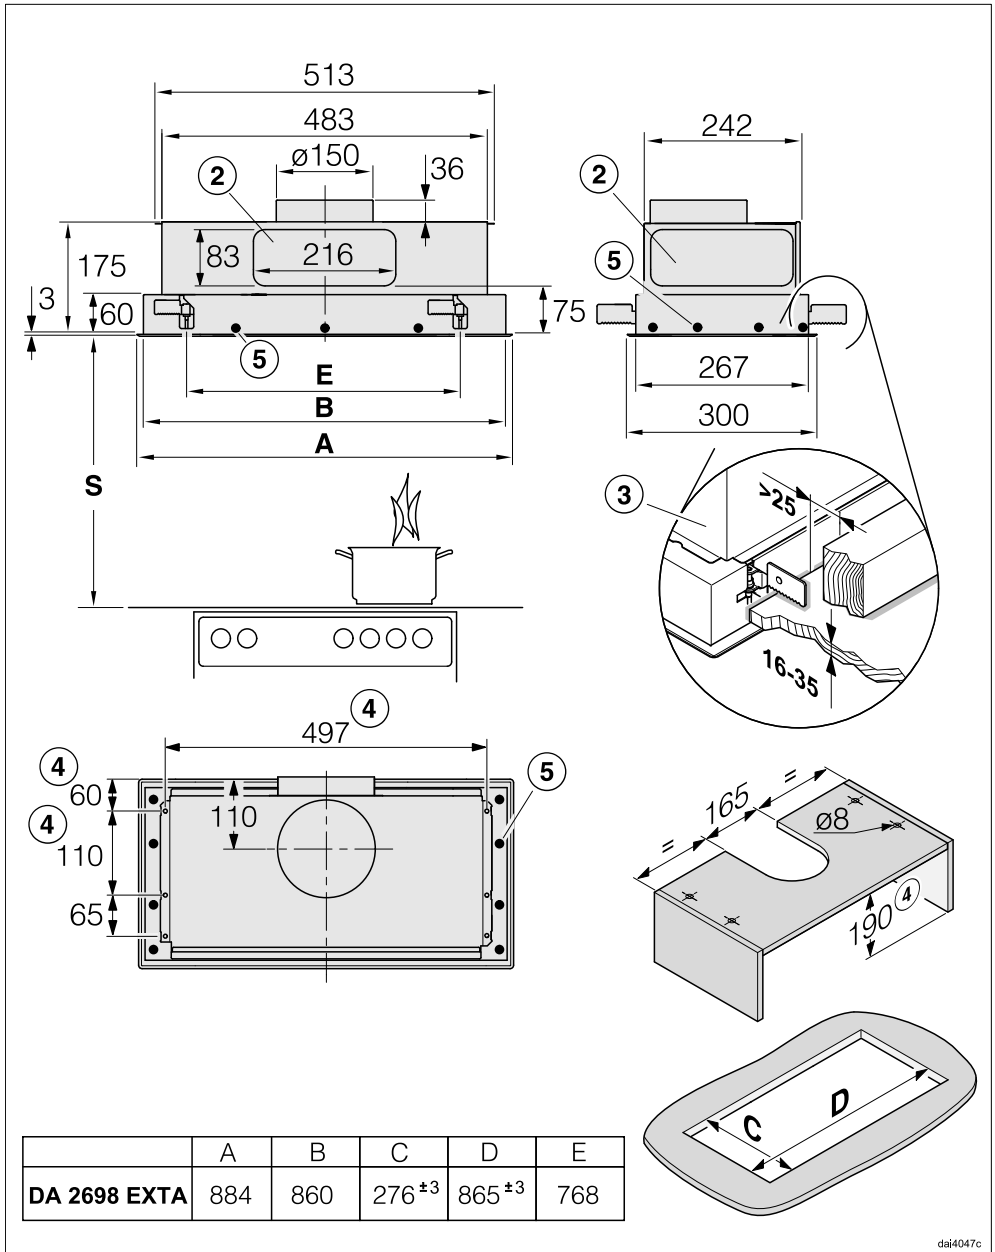

daj4047c

The drawing is not to scale

- ① The ducting can also be connected at the back.
- ② 222 x 89 mm flat ducting can be used as an alternative for ducting to the rear or to the side.
- ③ The rangehood is fastened in the cut-out using clamps. A solid installation surface, e.g., made of wood, is required. Make sure that the structure can support the load. Around the clamps, components such as supports and ducting must be at least 25 mm from the cut-out.
- ④ Alternatively, the rangehood can be secured to four fixing points on an interim shelf.
- ⑤ There are additional fixing points on the installation surface.

## Safety distance (S)

The minimum distances between the cooking surface of a cooktop (pan support(s) for gas models) and the bottom of the rangehood are as follows, unless a greater distance is specified by the manufacturer of your cooking appliance. See also “Warning and Safety instructions”.

Cooking appliance	Minimum distance S
Electric cooktop	600 mm (AU, NZ) 450 mm (HK, MY, SG, TH, TW)
Electric grill, deep fat fryer (electric)	650 mm
Multi-burner gas cooktop with maximum 45.4 MJ/h total output, with no burner having a greater output than 16.2 MJ/h.	650 mm
Multi-burner gas cooktop with total output greater than 45.4 MJ/h, but with a maximum of 77.8 MJ/h, with no burner having a greater output than 17.3 MJ/h.	760 mm
Multi-burner gas cooktop with total output greater than 77.8 MJ/h, with a single burner having a greater output than 17.3 MJ/h.	Not possible
Single burner gas cooktop with a maximum output of 21.6 MJ/h.	650 mm
Single burner gas cooktop with an output greater than 21.6 MJ/h, but with a maximum of 29.2 MJ/h.	760 mm
Single burner gas cooktop with an output greater than 29.2 MJ/h.	Not possible