



Color Variants

BO481112
Stainless steel-backed full glass door
Width 76 cm

Included accessories

1 x enamel baking tray.
suit. pyrolitic clean.
1 x rotary spit.
1 x grill shelf.
1 x grill tub with grid.
1 x pluggable meat probe.

Optional accessories

BA018105
Pull-out system
BA058115
Heating element for baking stone and
Gastronorm roaster.
BA058133
Baking stone.
GN340230
Gastronorm roaster in cast aluminium.

Product Variants

BO480112
Oven 400 series
Stainless steel-backed full glass door
Width 76 cm
right-hinged
Controls at the top

BO481112
Oven 400 series
Stainless steel-backed full glass door
Width 76 cm
left-hinged
Controls at the top

Handleless door / automatic door
opening
Pyrolytic system
17 heating methods, with core
temperature probe, rotisserie spit
and baking stone function
Automatic programs
TFT touch display
Panel-free appliance with surface
control module
Electronic temperature control from
30 °C to 300 °C
Net volume 110 litres

Heating methods

Hot air.
Eco hot air.
Top + bottom heat.
Top + 1/3 bottom heat.
Top heat.
1/3 top + bottom heat.
Bottom heat.
Hot air + bottom heat.
Hot air + 1/3 bottom heat.
Full surface grill + circulated air.
Full surface grill.
Compact grill.
Baking stone function.
Roaster function.
Dough proving.
Defrosting.
Keeping warm.

Handling

Automatic door opening.
Rotary knob and TFT touch display
operation.
Clear text display in multiple languages.
Option to save individual recipes (incl.
core temperature probe).
Personalisation of automatic programs.
Information key with use indicators.
Side-opening door opens up to 180°
angle.

Features

Three-point core temperature probe
with automatic shut-off and estimation
of cooking time.
Automatic programs.
Rotisserie spit.
Baking stone socket.
Actual temperature display.
Rapid heating.
Timer functions: cooking time, cooking
time end, timer, stopwatch, long-term
timer.
60 W halogen light on the top.
2 x 10 W halogen light on the side.
Enamelled side shelf supports with 5
tray levels, pyrolysis-safe.
Home network integration for digital
services (Home Connect) either via
cable connection LAN (recommended)
or wireless via WiFi.
The use of the Home Connect
functionality depends on the Home
Connect services, which are not
available in every country. For further
information please check: home-
connect.com.

Safety

Thermally insulated door with
quadruple glazing.
Child lock.
Safety shut-off.
Cooled housing with temperature
protection.

Cleaning

Characteristics
Color / Material Front
Built-in / Free-standing
Built-in
Integrated Cleaning system
Pyrolytic
**Required niche size for installation
(HxWxD)**
665-665 x 724-724 x 550
Dimensions of the product (mm)
670 x 752 x 547
**Dimensions of the packed product
(HxWxD) (mm)**
860 x 760 x 850
Control Panel Material
Door Material
Stainless steel behind glass
Net weight (kg)
78.650
Usable volume of cavity (l)
110
Cooking method
Baking stone function, Bottom heat,
Conventional heat, Defrost, Dough
proving setting, Full width grill, Half
width grill, Hot Air, Hot Air-Eco, Hot air
grilling, Roaster function, Top heat,
warming
First cavity material
Oven control
electronic
Number of interior lights
3
Approval certificates
Australia Standards, CE, Eurasian, G-
Mark, Ukraine, VDE
Length electrical supply cord (cm)
EAN code
4242006286118

Consumption and connection features

Number of cavities (2010/30/EC)
1
Energy efficiency class (2010/30/EC)
A
**Energy consumption per cycle
conventional (2010/30/EC)**
1.53
**Energy consumption gas oven per cycle
conventional (2010/30/EC)**
**Energy consumption per cycle forced
air convection (2010/30/EC)**
0.96
**Energy consumption gas oven per cycle
forced air convection (2010/30/EC)**
Energy efficiency index (2010/30/EC)
95.0
Connection Rating (W)
5520
Current (A)
25
Voltage (V)
220-240
Frequency (Hz)
50
Plug type
fixed connection, no plug
2020-01-14
Page 1

Pyrolytic system.
Gaggenau enamel.
Heated catalyser to clean the oven air.

Planning notes



Door hinge not reversible.
The door panel surface of the
appliance extends 47 mm from the
furniture cavity.
Consider the overhang when planning
to open drawers next to the appliance.
When planning a corner solution, pay
attention to the 90° door opening
angle.
To achieve the 550 mm installation
depth, the connection cable needs to
follow the slanted edge on the lower
right hand corner of the housing.
The mains socket needs to be planned
outside the built-in niche.
The LAN port can be found at the back
on the upper right side.

Connection

Total connected load 5.5 kW.
Plan a connection cable.
Plan a LAN cable.
Please check the user manual for how
to switch off the WiFi module.

BO481112
Oven 400 series
Stainless steel-backed full glass door
Width 76 cm
left-hinged
Controls at the top
2020-01-14
Page 2

Cross section of the top/bottom door edge gaps

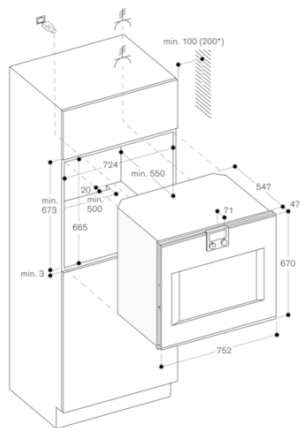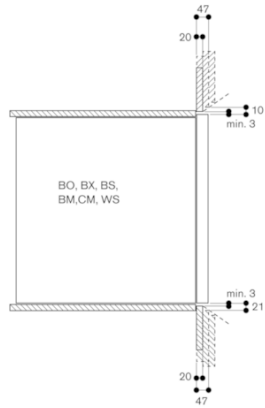

* 200 mm in conjunction with BA 018