



Color Variants

VP414111  
Width 38 cm

Included accessories  
2 x spatula.

Installation Accessories

VA420000  
Connection strip for combination with other Vario appliances of the 400 series for flush mounting  
VA420010  
Connection strip for combination with other Vario appliances of the 400 series for surface mounting  
VA440010  
Stainless steel appliance cover with mounting strip

VP414111  
Vario Teppan Yaki 400 series  
Width 38 cm

Can be combined perfectly with other Vario appliances of the 400 series  
Cooking directly on the hard-chromed metal surface, without any pots or pans  
Exact temperature control up to 240 °C  
Optimum heat distribution  
Solid stainless steel control knob  
Precision crafting of 3 mm stainless steel  
For surface mounting with a visible edge or for flush mounting

Cooking zones  
Usable area 31 x 44cm (WxD)

Handling  
2 flexible installation control knobs (1m connecting cable)  
Control knobs with illuminated ring, cooking zone and temperature markings.  
Electronic temperature control from 120 °C to 240 °C.

Features  
Stainless steel  
Two zones, each 1500 W, can be operated together as a complete surface or each halve separately.  
Keep warm setting.  
Cleaning stage.  
Easy to clean, similar to a cast pan.

Safety  
Safety shut-off.  
Pre-heat and residual heat indicator.  
Operation indicator.

Planning notes  
Depending on the type of installation (surface-mounted or flush-mounted, with or without an appliance cover), the specific location of the cut-out and the knob positions may vary.  
Appliance can be snapped into the worktop from above.  
The drawing "Installation of the control knob" must be observed if the panel is more than 23 mm thick (there must be a recess at the rear).  
If combining several Vario appliances of the 400 series, a connection strip VA 420 must be placed between the appliances. Depending on the type of installation, the corresponding connection strip must be provided.  
The bearing capacity and stability, in the case of thin worktops in particular, must be supported using suitable substructures. Take into account the appliance weight and additional loads.  
Additional instructions for flush mounting:  
Installation is possible in worktops made of stone, synthetics or solid wood. Heat resistance and watertight sealing of the cut edges must be observed. Concerning other materials please consult the worktop manufacturer.  
The groove must be continuous and even, so that uniform placing of the appliance on the gasket is ensured. Do not use discontinuous lining.  
The joint width may vary due to size tolerances of the combinations and of the worktop cut-out.  
If installing several appliances in individual cut-outs allow for a division bar of minimum 50 mm between the individual cut-outs.

Characteristics  
Product name/family  
Vario/Domino Teppan Yaki  
Built-in / Free-standing  
Built-in  
Energy input  
Electric  
Type of control  
Electronic  
Grill grating material  
Required niche size for installation (HxWxD)  
118 x 360 x 490  
Width of the product (mm)  
380  
Dimensions of the product (mm)  
118 x 380 x 520  
Dimensions of the packed product (HxWxD) (mm)  
400 x 460 x 600  
Net weight (kg)  
12.276  
Gross weight (kg)  
16.1  
Residual heat indicator  
Separate  
Location of control panel  
Hob front  
Basic surface material  
Color of surface  
Stainless steel, Stainless steel  
Color of frame  
Stainless steel  
Approval certificates  
Australia Standards, CCC, CE, China, China ROHS 20, Eurasian, G-Mark, Ukraine, VDE  
Length electrical supply cord (cm)  
150  
EAN code  
4242006280130

Consumption and connection features  
Electrical connection rating (W)  
3000  
Gas connection rating (W)  
Current (A)  
16  
Voltage (V)  
220-240  
Frequency (Hz)  
50-60  
2020-01-06  
Page 1

A minimum lateral clearance of at least 40 mm from adjacent heat-sensitive furniture or contact surfaces must be observed or thermal insulation fitted.  
Appliance weight: approx. 12 kg.


Connection  
Total connected load 3.0 kW.  
Connecting cable 1.5 m without plug.



measurements in mm

**A:** When installing with appliance cover, take the deeper cut-out into consideration (observe separate planning notes)

measurements in mm

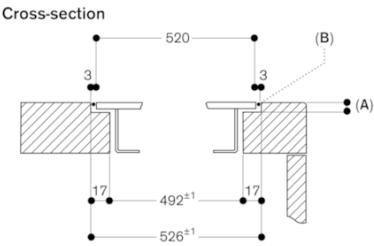


A: 3.5<sup>0.5</sup>  
 B: Fill with silicone

When installing with appliance cover, pay attention to the deeper cut-out and the front and rear groove width.


measurements in mm

Installation with appliance cover, surface mounting

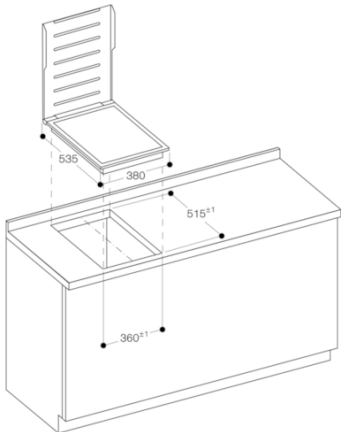

measurements in mm

Installation with appliance cover, flush mounting

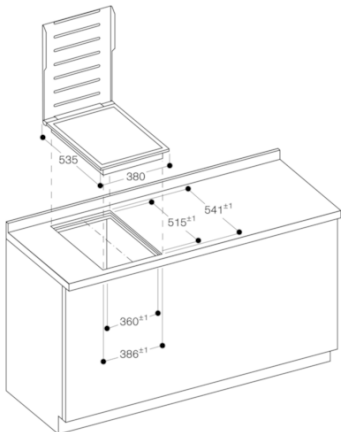

measurements in mm