

## KM 7200 FR

Induction cooktop

Onset controls with 3 cooking zones for maximum convenience.



- Simple operation - EasySelect including timer
- Attractive design - 574 mm wide with all-round frame
- Versatile - 3 cooking zones
- Shortest heating-up times - TwinBooster
- Food always cooked to perfection - keeping warm function

<b>Heating type</b>	
Heating type	Induction
<b>Construction type</b>	
Independent of oven	•
<b>Design</b>	
Elegant glass ceramic surface	•
Ceramic surface colour	Black
Print design	Decor basalt grey
All-round stainless steel frame	•
<b>Zone details</b>	
Number of zones	4
<b>Zones</b>	
Position	left centre
Type	Dual-circuit ring
Diameter in mm	Ø 140-280
Power rating in W	2600
Booster in W	3300
TwinBooster in W	5500
Position	rear right
Type	Dual-circuit ring
Diameter in mm	140-190 mm
Power rating in W	1850
TwinBooster in W	3000
Position	front right
Type	Dual-circuit ring
Diameter in mm	Ø 100-160
Power rating in W	1400
TwinBooster in W	2200
<b>User convenience</b>	
Operation via touchpad controls	EasySelect
Digital power level display	•
Pan/Pan-size sensors	•
Minute minder	•
Automatic switch-off for all rings	•
AutoBoost	•
Keeping warm	•
Individual setting options (e.g. audible signal tones)	•
<b>Efficiency and sustainability</b>	
Residential heat utilisation	•
<b>Cleaning convenience</b>	
Easy to clean ceramic surface	•
<b>Safety</b>	
Safety cut-out	•
Lock function	•
System lock	•
Fault monitoring	•
Integrated cooling fan	•
Overheating protection	•
Residual heat indicator	•

## KM 7200 FR

Induction cooktop

Onset controls with 3 cooking zones for maximum convenience.




Technical data	
Dimensions in mm (width)	574
Dimensions in mm (depth)	504
Built-in height with mains connection box in mm	48
Cutout dimensions in mm (width)	560
Cutout dimensions in mm (depth)	490
Total connected load in kW	7.4
Weight in kg	10
Voltage in V	230
Frequency in Hz	50-60
Number of phases	1
Cable length in m	1.4
Standard accessories	
Connection cable	•

## KM 7200 FR

Induction cooktop

Onset controls with 3 cooking zones for maximum convenience.

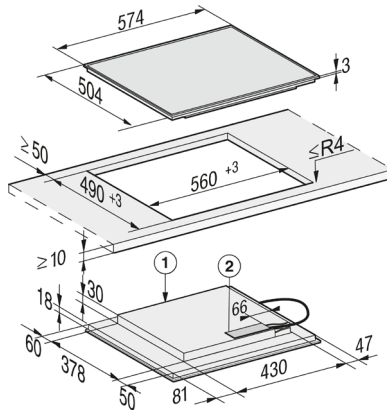

KM 7200 FR - (Installation drawing)

1. Front
2. Mains connection box, mains connection cable,  
L = 1440 mm, loose insert