

DBI654IBXXLS

General description

Turbo Drying™ - Fan assisted moist air extraction
Style
Installation type: Built under work top
Size: XXL, 86 cm
Number of baskets: 3
15 place settings
8 Steel™ Construction, SCS+ (Super Cleaning System+)
Cutlery Flexi Tray with Instant Lift™
Upper rack type: Premium - two foldable wine shelves, fixed pin rows and one foldable glass support
Lower rack type: Premium - foldable pin rows
Cutlery basket

Construction & Performance

8 Steel™ construction
Hidden heater
SCS+ (Super Cleaning System+)
Sensi Clean™ Sensor - detects the dirtiness level
Number of spray arms: 3
Number of spray zones: 9
Jet Spray™ - extra dishwashing power for tall objects
Wide Spray™ - extra washing power for pots and pans
Power Zone™ for the cutlery basket

Use & Flexibility

15 place settings
Basket class: Premium
Number of basket levels: 3
Cutlery Flexi Tray with Instant Lift™
Height adjustable upper basket
Easy sliding telescope rails with ball bearings for the upper basket
Dense basket wiring in both upper and lower basket
Easy-to-use cutlery basket

Interaction & Control

Display type: LCD display
Program names in full text
Number of programs: 13
Number of options: 4
Delayed start: Variable start delay up to 24 hours
Status LED light
Display and sound feedback settings

Programs, options and modes


13 programs: Auto wash; Eco wash; Hygiene wash; Time program; Plastic wash; Heavy wash; Rinse and hold; Sanitation wash; Upper half wash; Lower half wash; Crystal glass; Quick Pro wash; Self-cleaning
High temperature
Extra dry
Variable start delay up to 24 hours
Super rinse
Time set
Green mode
Speed mode
Night mode
Intensive mode

Design & Integration

Kick plate adjustable depth: 30-94 mm
From front adjustable rear foot
Integrated anti-siphon device
Niche dimensions (HxWxD): 86 x 60 x 56 cm

Safety & Maintenance

Aqua Safe™
Kid Safe™ - panel
Rinse-aid indication: Notification in display
Stand by water protection
Exterior float
Anti block drain pump

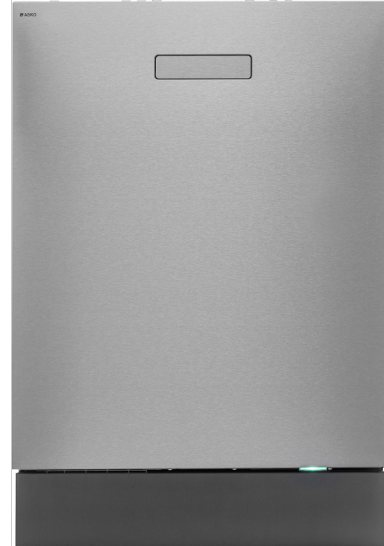

Technical data

Size: 3/4" Can be connected to hot or cold water
Max. temperature of inflow water: 70 °C
Noise level: 42 dB(A)
Reference program: 1
Total cycle time of reference program (min): 170 min
Estimated yearly energy consumption: 295 kWh
Energy consumption reference program: 0,79 kWh
Energy stars: 3,5
Water stars: 5
Water consumption: 12,2 l
Consumption in off mode: 0,49 W
Consumption in standby mode: 0,49 W
Connection rating: 2000 W
Voltage: 220-240 V
Number of phases: 1
Current: 10 amp
Frequency: 50 Hz
Required inlet water pressure: 0,03-1 MPa
Net weight: 47 kg
Yes
Yes

Dimensions

Product dimensions (HxWxD): 85,9 x 59,6 x 55,9 cm
Depth with door open: 1238 mm
Length electrical cord: 1,825 m
Length inlet hose: 163 cm
Length outlet hose: 200 cm

Logistic information

Dimensions of packed product (HxWxD): 93 x 64 x 68 cm
Gross weight: 50,6 kg
Product code: 729068