

H 2267-1 B ACTIVE

Ovens

with a timer, PerfectClean and FlexiClip telescopic runners.



- 7-segment display with retractable knobs – EasyControl
- Particularly easy to clean – PerfectClean finish
- Lots of room and flexibility – 76 l oven capacity on 5 levels
- Easy handling – FlexiClip telescopic runners
- Protects against burns – touch-cool fronts

Price \$ 1,899.00**

** GST inclusive

Model and design	
Built-in oven	•
Appliance colour	Stainless steel/Clean Steel
Retractable knobs	•
Convenience features	
Rapid heat-up	•
Operating modes	
Defrosting	•
Grill	•
Fan plus	•
Intensive bake	•
Conventional heat	•
Bottom heat	•
Fan grill	•
User convenience	
Display	EasyControl
Time of day display	•
Minute minder	•
Programmable end of cooking duration	•
Actual temperature display	•
Target temperature display	•
Audible signal when target temperature is reached	•
Recommended temperature	•
Individual settings	•
Cleaning convenience	
Stainless steel front with CleanSteel finish	•
Oven compartment with PerfectClean and catalytically enamelled liners	•
Hinged grill heater element	•
CleanGlass door	•
Safety	
Appliance cooling system and touch-cool fronts	•
Safety switch-off	•
System lock	•

H 2267-1 B ACTIVE

Ovens

with a timer, PerfectClean and FlexiClip telescopic runners.




Technical data	
Oven compartment volume in l	76
No. of shelf levels	5
Numbered shelf levels	•
Oven light	1 halogen spot
Appliance width in mm	595
Appliance height in mm	596
Appliance depth in mm	569
Weight in kg	42.0
Total rated load in kW	3.5
Voltage in V	220-240
Number of phases	1
Fuse rating in A	16
Length of supply lead in m	2
Standard accessories	
Baking tray with PerfectClean	2
Universal tray with PerfectClean	1
Baking and roasting rack	1

H 2267-1 B ACTIVE


Ovens

with a timer, PerfectClean and FlexiClip telescopic runners.

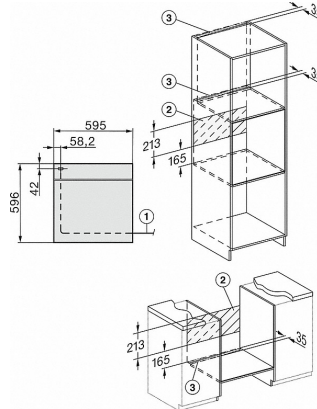


H226x-1B/BP/E/EP/IP, H2760B/BP, H28x0B/BP, H7x6xB/BP/BPX installation drawings

- 1) Netzanschlussleitung, L=2000 mm
- 2) In diesem Bereich kein Anschluss
- 3) Lüftungsausschnitt min. 150 cm²

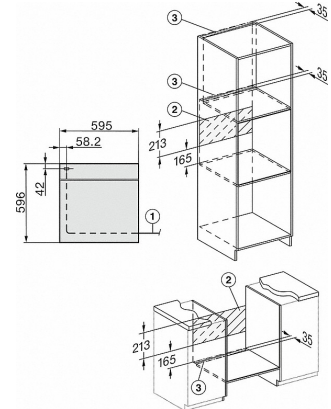


H226x-1B/BP/E/EP/IP, H2760B/BP, H28x0B/BP, H7x6xB/BP/BPX, installation drawings, GB, AUS

- 1) Netzanschlussleitung, L=2000 mm
- 2) In diesem Bereich kein Anschluss
- 3) Lüftungsausschnitt min. 150 cm²

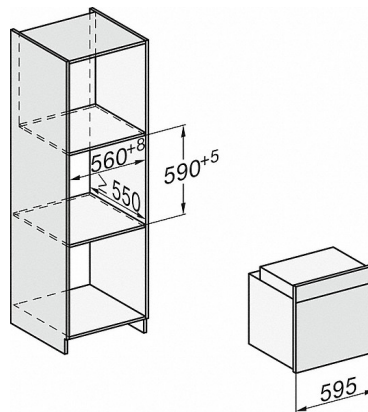

H226x-1B/BP/E/EP/IP, H2760B/BP, H28x0B/BP, H7x6xB/BP/BPX, installation drawings

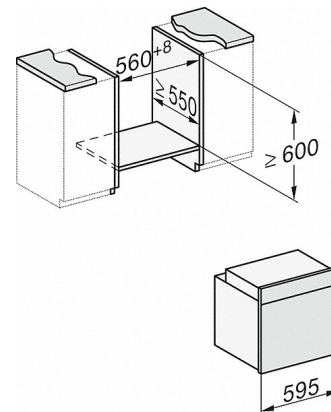


H226x-1B/BP/E/EP/IP, H2x6xB/BP, H7x6xB/BP/BPX, installation drawings

If the oven is to be installed under a hob, follow the instructions for installing the hob and the height of the hob.

H 2267-1 B ACTIVE


Ovens

with a timer, PerfectClean and FlexiClip telescopic runners.

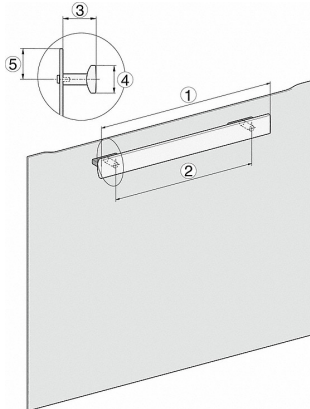

H226x-1B/BP/E/EP/I/IP, installation drawings

- 1) 400 mm
- 2) 360 mm
- 3) 42 mm
- 4) 27 mm
- 5) 32,5 mm

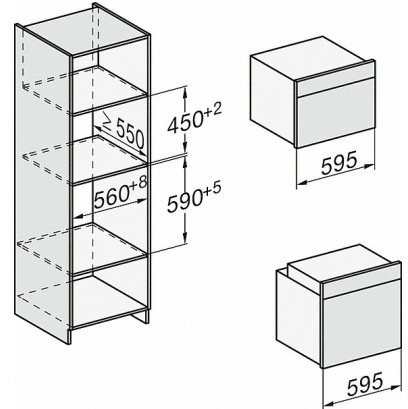

H226x-1B/BP/E/EP/I/IP, H2760B/BP, H28x0B/BP, H7x40BM/BMX, H7x6xB/BP/BPX, installation drawings