






VENTICELLO BACK-TO-WALL TOILET SUITE

Product Image	Technical Specification
---------------	-------------------------



Featuring Villeroy & Boch DirectFlush 'Rimless' Technology

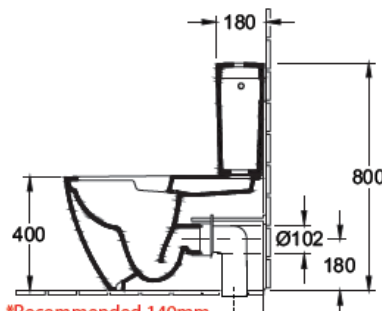

***Recommended 140mm**
Adjustment range 110-200mm
With extension bend 200-290mm

Water Entry:	Rear water entry requires ½" BSP male thread extending 10mm past the finished wall			
*S-Trap Set-out options	Distance from finished wall to centre of soil pipe	Vario Bend required		Installation Notes
Recommended	140mm	50015P	Supplied standard with S-trap Suites	To be cut to required length on-site
Standard Adjustment Range	110-200mm	50015P	Supplied standard with S-trap Suites	To be cut to required length on-site
With extension bend	200-290mm	8702	Order separately with P-Trap Suite	To be cut to required length on-site - Requires installation into DWV pipe (adaptor supplied) or into a pan collar installed flush with the finished floor
Flushing Options:	4.5/3L toilets can be easily converted to 6/3L on-site where it is approved to do so; one-click conversion instructions are included inside the cistern			

Description

Venticello BTW Toilet Suite with Soft-Closing Seat

4612R001S4CB	P-Trap
4612R0R1S4CB	P-Trap with CeramicPlus
4612R101S4B	S-Trap
4612R1R1S4B	S-Trap with CeramicPlus

Additional Information

- DirectFlush - Rimless technology
- 5 Year Warranty *Conditions Apply
- WELS 4.5/3L 4 Star

Soft Closing

Villeroy & Boch

Ceramic Plus

Villeroy & Boch

